A grayscale photograph of a medical facility interior. In the foreground, a large, modern medical cart with multiple drawers and a monitor is visible. In the background, there are more medical equipment, including a ventilator and a monitor, and a wall with various control panels and displays. The image is partially obscured by a large, translucent teal diagonal shape that runs from the top left to the bottom right.

RYAN PLUS TRADING

L.L.C S.O.C

**MEDICAL DEVICE
PRODUCT CATALOG**



RYAN PLUS TRADING L.L.C S.O.C

Where Quality Meets Care



Contents

1	Hospital Furniture	05
	Medical Bed	06
	Electrical Bed	06
	Manual Bed	12
	Child Bed	16
	Stretcher	18
	Ambulance Stretcher	18
	Patient Transfer Stretcher	21
	Non Magnetic Stretcher	25
	Medical Trolley	26
	Medical Workstation Trolley	26
	Wireless Nursing Trolley	26
	Instrument Trolley	27
	Anesthesia Trolley	27
	Emergency Trolley	28
	Medicine Trolley	29
	Infusion Trolley	30
	Treatment Trolley	30
	Linen Trolley	31
	Patient Record Trolley	31
	Utility Trolley	32
	Steel-Plastic Trolley	32
	Examination Couch	33
	Medical Chair	34
	Dialysis Chair	34
	Elderly Chair	36
	Accompany Chair	37
	Infusion Chair	39
	Waiting Chair	40
	Bedside Cabinet	41
	Overbed Table	41
	Bedside Screen	41
	Mattress	42
	IV Pole	42
2	Rehabilitation	43
	Wheelchair	44
	Patient Transfer Chair	44
	Nursing Bed	45
	Crutch	45
	Walking Aid	45
	Bath Chair	46
	Commode Chair	46
	Electrical Patient Lift	46

Contents

3	Operating Room Equipment	47
Operating Table	48	
Dental Chair	51	
Operating Lamp	52	
Medical Pendant	59	
Bed Head Unit	60	
CV And Blood Freezer	60	
Anesthesia Machine	61	
Ventilator Machine	62	
Obstetric Table & Bed	63	
Infant Incubator	66	
Suction Machine	68	
Oxygen Concentrator	68	
Autoclave	69	
4	Medical Device	71
Patient Monitor	72	
Infusion and Syringe Pump	73	
B Ultrasound Machine	74	
Endoscope	78	
Laryngoscope	80	
Defibrillator Machine	81	
ECG	82	
Diathermy Machine	82	
5	Imaging Equipment	83
C-Arm Machine	84	
Mammography	85	
Digital X-Ray Machine	85	
Dental X-Ray Machine	87	
6	Stainless Steel Medical Equipment	88

RYAN PLUS TRADING L.L.C S.O.C

RYAN PLUS TRADING L.L.C S.O.C is a leading provider of high-quality medical devices and healthcare solutions, committed to improving patient care through innovation and precision.

Established in 2024 and headquartered in Dubai, United Arab Emirates, but it carries over 15 years of experience in international markets. We serve healthcare providers across the UAE and the surrounding region.

The company specializes in medical equipment, dialysis unit design and maintenance, water treatment systems, and industrial pump technologies. We are dedicated to delivering high-quality, innovative, and sustainable solutions.

RYAN PLUS remains dedicated to advancing healthcare standards and improving patient outcomes throughout the region.



Anhui Liaison Medical Equipment Co.,Ltd
No.3333, Hangzhou Road, Baohe District, Hefei, Anhui Province, China
Tel: +86 155 5119 5809 (Whatsapp, Wechat, Viber)
Email: tony@liaisonmed.com

Date: 1/4/2025

Manufacturer's Authorization

To Whom It May Concerns,

We, Anhui Liaison Medical Equipment Co.,Ltd. is a reputable manufacturer of Hospital furniture, Medical device, Operating Equipment and other medical supplies having factory at **No.3333, Hangzhou Road, Baohe District, Hefei, Anhui Province, China** do hereby authorize:

Company: Ryan Plus Medical Equipment Trading L.L.C

Country: United Arab Emirates

To be our exclusive distributor, **Ryan Plus Medical Equipment Trading L.L.C.** is our authorized exclusive distributor and they are authorized to submit a bid the purpose of which is to provide the Goods manufactured by us and to subsequently negotiate and sign the Contract in the territory of **United Arab Emirates**

We, Anhui Liaison Medical Equipment Co.,Ltd./Our authorized agent **Ryan Plus Medical Equipment Trading L.L.C.** would be able to offer the installation, Training, Service and warranty at site and fulfill all terms manufactured by us.


Sincerely,

Name: Lilian Hu

Authorized signature:
Title: Sales Manager



Certificate -

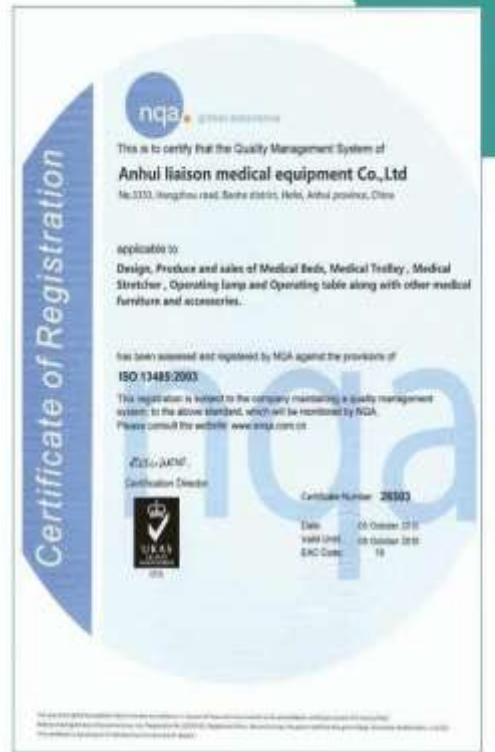

01

Hospital Furniture

Medical Bed — Electrical Bed

MN-EB001S
Ten Functions ICU beds

Technical Specification:

External Length:	2290mm
External width:	1020mm
Adjustable height range:	500-1000mm
Mattress platform:	L(1830-2030)*W820mm
Backrest section adjustment range:	0-60°
Knee section adjustment range:	0-45°
Trendelenburg & Reserve-Trendelenburg:	0-10°
Left Tilt:	0-10°
Right Tilt:	0-10°
Loading capacity:	250kg

Technical Configuration:

Linear Motor	7 pcs
6inch double side secure castor, central braking	4 pcs
ABS head and foot board, one step removable	1 set
ABS side rail with integrated LCD control panel	4 pcs
IV pole	1 pc
5th Directional wheel	1 pc
X-Ray radiolucent bed platform	1 set
Braking pedal	2 pcs
Night light	1 set
Data storage system	1 set
CPR quick release system (manual and electric)	1 set
Bed push handle for emergency transfer	1 set
Weighing system	

Technical Specification:

External Length:	2290mm
External width:	1020mm
Adjustable height range:	500-1000mm
Mattress platform:	L(1830-2030)*W820mm
Backrest section adjustment range:	0-75° ± 5°
Knee section adjustment range:	0-45° ± 5°
Trendelenburg & Reserve-Trendelenburg:	0-12°
Loading capacity:	250kg

Technical Configuration:

Linear Motor	6pcs
6inch double side secure castor, central braking	4pcs
ABS head and foot board, one step removable	1set
ABS side rail with integrated LCD control panel	4pcs
IV pole	1pc
5th Directional wheel	1pc
X-Ray radiolucent bed platform	1set
Braking pedal	2pcs
Night light	1set
Data storage system	1set
CPR quick release system (manual and electric)	1set
Bed push handle for emergency transfer	1set
Weighing system	

MN-EB001
8 Functions electrical hospital beds

MN-EB002
**Seven Functions LINAK MOTOR
ICU Beds**



Technical Specification:

Size:	223*99/105*57/82CM
Mattress platform:	L(1830-2030)*W820mm
Backrest section adjustment range:	0-75° ± 5°
Knee section adjustment range:	0-45° ± 5°
Trendelenburg & Reserve-Trendelenburg:	0-12°
Left Tilt:	0-12°
Right Tilt:	0-12°
Loading capacity:	250kg

Technical Configuration:

Linear Motor	6pcs
6inch double side secure castor, central braking	4pcs
ABS head and foot board, one step removable	1set
IV pole	1pc
Braking pedal	2pcs
CPR Manual	1set



MN-EB003
VIP Electrical Hospital Beds

Technical Specification:

Size:	L213*W105*H45-70cm
Loading capacity:	250kg

Technical Configuration:

5 inch double side secure castor, central braking	4pcs
ABS head and foot board, one step removable	1set
ABS side rail with integrated control panel and angle indicator	4pcs
IV pole	1pc
Bumper wheels on each corner	4pcs
Braking pedal	2pcs
Weighing System	



MN-EB003S
**New Design Five Function
ICU Bed**



Parameters:

Size:	L213*W105*H45-70cm
Loading capacity:	250kg
Linak Motor	4pcs
ABS head and foot board	1set
ABS Side Rails	4pcs
Embedded Control Panel	2Pcs
IV pole	1pc
Angle indicator	2Pcs
Central Lock 5" Castors	4Pcs



MN-EB004

Five Function Electrical Beds

Parameters:

Size:	L213*W105*H45-70cm
Loading capacity:	250kg
Linak Motor	4pcs
ABS head and foot board	1set
ABS Side Rails	4pcs
Hand Hold Control	2Pcs
IV pole	1pc
Central Lock 5" Castors	4Pcs
CPR Release Holder	2Pcs



MN-EB014

**Five Function New Design
Electrical Bed**



Parameters:

Size:	L213*W105*H45-70cm
Loading capacity:	250kg
Linak Motor	4pcs
ABS head and foot board	1set
ABS Side Rails	4pcs
Hand Hold Control	2Pcs
IV pole	1pc
Central Lock 5" Castors	4Pcs
CPR Release Holder	2Pcs



MN-EB015

Five Function 3 Controllers Electrical Bed

Parameters:

Size:	L213*W105*H45-70cm
Loading capacity:	250kg
Linak Motor	4pcs
Electrical CPR	1Pcs
ABS head and foot board	1set
ABS Side Rails	4pcs
Hand Hold Control	1Pcs
Embedded Control in Side Rails	2Pcs
Embedded Control in Foot board	1Pcs
Central Lock 5" Castors	4Pcs



MN-EB005
Five Function Paramount Type Hospital Beds

Parameters:



Size:	L213*W105*H45-70cm
Loading capacity	250kg
Linak Motor	4pcs
ABS head and foot board	1set
ABS Side Rails	4pcs
Hand Hold Control	1pc
IV pole	1pc
Central Lock 5" Castors	4pcs



MN-EB006 Five Function



Central Lock System



MN-EB006A Five Function



Without Central Lock System

MN-EB006B Three Function



Without Central Lock System

Parameters:

Size:	L213*W105*H45-70cm
Bed Frame:	Powder Coating Steel
Motors	4pcs
ABS head and foot board	1set
ABS Side Rails	4pcs
Hand Hold Control	1Pc
IV pole	1pc
Central Lock 5" Castors	4Pcs

MN-EB017

Five Function ICU Bed

Technical Specification:

Size:	223*99/105*57/82CM
Mattress platform:	L(1830-2030)*W820mm
Backrest section adjustment range:	0-75° ±5°
Knee section adjustment range:	0-45° ±5°
Trendelenburg & Reserve-Trendelenburg:	0-12°
Left Tilt:	0-12°
Right Tilt:	0-12°
Loading capacity:	250kg



MN-EB007

Five Function Basic Electrical Bed



Parameters:

Size:	L213*W96*H45-70cm
Bed Frame:	Powder Coating Steel
Motors:	4pcs
ABS head and foot board	1set
Aluminum Alloy Side Rails	2pcs
IV pole	1pc
Central Lock 5" Castors	4Pcs



MN-EB008

Five Functions Basic Electrical Hospital Beds

Parameters:

Size:	L213*W96*H45-70cm
Motors:	4pcs
ABS head and foot board	1set
Aluminum Alloy Side Rails:	2pcs
Hand Hold Control	1Pc
IV pole	1pc
Castors with Brake	4Pcs



MN-EB009
Three Function Electrical Hospital Beds



Parameters:

Size:	L213*W105*H45-70cm
Motors:	3pcs
ABS head and foot board	1set
ABS Side Rails	4pcs
Hand Hold Control	1pc
IV pole	1pc
Central Lock 5" Castors	4pcs



MN-EB009A
Economical Three Function Electrical Bed

Parameters:

ABS head and foot board	1set
ABS Side Rails	4pcs
Hand Hold Control	1Pc
IV pole	1pc
Central lock 5"Castors	4Pcs



MN-EB011
Ultra Low 3 Function Electrical Bed
(Minimum Height 35CM)



Technical Parameter:

Size:	L213*W96*H35-62cm
Loading capacity:	150kg
Motor:	3pcs
ABS head and foot board	1set
Aluminum Alloy Side Rails	2pcs
IV pole	1pc



MN-EB012
Three Function Manual&Electric Bed

Technical Parameter:

Size:	L213*W105*H35-62cm
Loading capacity:	150kg
Motor:	3pcs
Crank	3pcs
ABS head and foot board	1set
ABS Side Rails	4pcs
IV pole	1pc



Medical Bed — Manual Bed

MN-MB012

ABS Side Rails 4 Crank Manual Bed



Parameters:

Size:	L213*W105*H48-70cm
ABS head and foot board	2Pcs
ABS side rail	4pcs
Crank Quantity:	4Pcs
Brake with Lock	4Pcs
Accessories:	IV Pole



MN-MB002

Five Function Manual Hospital Beds

Parameters:

Size:	L213*W95*H48-70cm
ABS head and foot board	2Pcs
Aluminum side rail	2pcs
Crank Quantity:	4Pcs
Bed Castors with Brakes	
Accessories:	IV Pole



MN-MB003A

Three Function Manual Hospital Beds



Parameters:

Size:	L213*W1050*H48-70cm
ABS head and foot board	2Pcs
ABS side rail	2Pcs
Crank Quantity:	3Pcs
Bed Castors with Brakes	
Accessories:	IV Pole



MN-MB003
Three Function Manual Hospital Beds

Parameters:

Size:	L213*W950*H48-70cm
ABS head and foot board	2Pcs
Aluminum side rail	2Pcs
Crank Quantity:	3Pcs
Bed Castors with Brakes	
Accessories:	IV Pole



MN-MB005
Two Crank Manual Hospital Beds



Parameters:

Size:	L213*W95*H48cm
ABS head and foot board	2Pcs
Aluminum side rail	2Pcs
Crank Quantity:	2Pcs
Bed Castors with Brakes	
Accessories:	IV Pole



MN-MB006
Single Crank Manual Hospital Beds

Parameters:

Size:	L213*W950*H48-70cm
ABS head and foot board	2Pcs
Aluminum side rail	2Pcs
Crank Quantity:	1Pcs
Bed Castors with Brakes	
Accessories:	IV Pole



MN-MB007
Flat Hospital Bed



Parameters:

Size:	L213*W950*H48-70cm
ABS head and foot board	2Pcs
Accessories:	IV Pole

MN-OB001
Two Crank Orthopedic Hospital Beds



Parameters:

Size:	L213*W950*H48-70cm
ABS head and foot board	2Pcs
Aluminum side rail	2Pcs
Crank Quantity:	2Pcs
Central Lock System:	
Accessories:	IV Pole



MN-MB010
Three Function Hydraulic Hospital Beds



Parameters:

Size:	L213*W950*H48-70cm
ABS head and foot board	2Pcs
ABS side rail	2Pcs
Crank Quantity:	2Pcs
Foot Pedal	1Pc
Hydraulic Pump	1Pc
Bed Castors with Brakes	
Accessories:	IV Pole

Parameters:

Size:	L213*W950*H48-70cm
ABS head and foot board	2Pcs
ABS side rail	2Pcs
Crank Quantity:	2Pcs
Foot Pedal	1Pc
Hydraulic Pump	1Pc
Bed Castors with Brakes	
Accessories:	IV Pole
Back-rest Adjustment:	0-75° (±10°)
Knee-rest Adjustment:	0-35° (±10°)



MB011

Three Function Economical Hydraulic Hospital Bed



MN-MB013A Economical Single Crank Hospital Bed



Parameters:

Size:	L213*W950*H48-70cm
ABS head and foot board	2Pcs
Aluminum side rail	2Pcs
Crank Quantity:	1Pcs
Bed Castors with Brakes	
Accessories:	IV Pole
Back-rest Adjustment:	0-75° (± 10°)



MN-MB014A Economical Double Crank Hospital Bed



Parameters:

Size:	L213*W95*H48cm
ABS head and foot board	2Pcs
Aluminum side rail	2Pcs
Crank Quantity:	2Pcs
Bed Castors with Brakes	
Accessories:	IV Pole



MN-MB015A Economical Three Crank Hospital Bed



Parameters:

Size:	L213*W950*H48-70cm
ABS head and foot board	2Pcs
Aluminum side rail	2Pcs
Crank Quantity:	3Pcs
Bed Castors with Brakes	
Accessories:	IV Pole



Medical Bed — Child Bed

MN-CB001
Two Crank Manual Child Bed



Parameters:

Size:	L188*W90*H60cm
ABS head and foot board	2Pcs
Aluminum side rail	2Pcs
Crank Quantity:	2Pcs
Bed Castors with Brakes	
Accessories:	IV Pole



MN-CB002
Flat Child Cot Bed



Parameters:

Size:	L180*W90*H50cm
Aluminum side rail	2Pcs
Crank Quantity:	2Pcs
Bed Castors with Brakes	

MN-CB003
Flat Baby Cot Bed




Parameters:

Size:	L1210*W69*H60cm
Aluminum side rail	2Pcs
Bed Castors with Brakes	2Pcs

MN-CB004
Baby Cot



MN-CB004A
Economical
Baby Cot

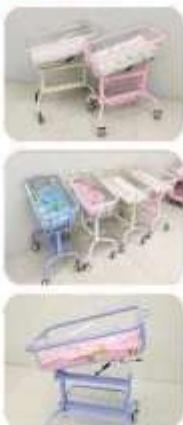

Material: ABS/Steel/Aluminum Alloy
4 Castors with brake

MN-CB005
Baby Cot



MN-CB005A
New Design Baby Cot



Material: ABS/Steel/Aluminum Alloy
4 Castors with brake

MN-CB006
Baby Cot



Parameters:

Size:	L160*W80*H60cm
304 Stainless Steel Head&Foot Board	2Pcs
304 Stainless Steel Side Rails	2Pcs
Crank Quantity:	2Pcs
Bed Castors with Brakes	
Accessories:	IV Pole



MN-CB007
Stainless Steel Baby Cot

Parameters:

Size:	L73*W41*H61cm
304 Stainless Steel	
Bed Castors with Brakes	

Stretcher — Ambulance Stretcher

Emergency Stretcher

MN-AS006



MN-AS007



MN-AS007-1



MN-AS008



MN-AS008-1



MN-AS008-2



MN-AS009



MN-AS009-1



MN-AS10-1



MN-AS11-1



Gondola Stretcher

MN-AS015



MN-AS016



MN-AS017



Scoop Stretcher

MN-SS002



MN-SS003



MN-SS004



MN-SS004-1



Folding Stretcher

MN-AS022



MN-AS024



MN-AS026



MN-AS027




MN-AS027-1



MN-AS029-1



MN-AS029-2

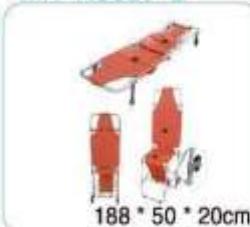

Plastic Stretcher

MN-AS031




MN-AS032




MN-AS033




MN-AS034

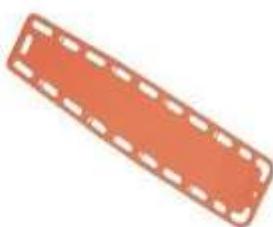

MN-AS035

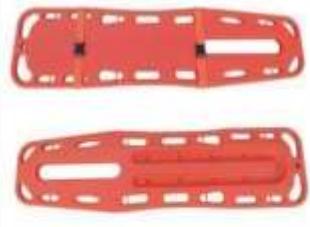

MN-AS036

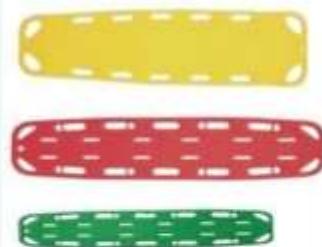

Upstair Stretcher

MN-AS044-1



90 * 51 * 91cm

MN-AA045



Folding size:1050*518*245mm
Expanding size:945*518*1370

MN-AS046



90 * 51 * 91cm

Stretcher — Patient Transport Stretcher

MN-YD001

New Design Hydraulic Stretcher



Parameters:

Size:	1950*700*615-935mm
Back-rest lifting:	0° -82° (±5°)
Leg-rest lifting:	0° -30° (±5°)
Reserved trendelenburg:	0° -12°
Trendelenburg:	0° -12°
CPR function	
Height adjustment:	615-935mm
Loading bearing:	220kg
X-Ray Cassette for Back Section	
Central Lock System	
Aluminum alloy side rails	
4 PCs Bumpers for corners	
IV pole and Oxygen Cylinder holder	



MN-YD002

Paramount Type Deluxe Hydraulic Stretcher



Parameters:

Size:	1880*620*560-890mm
Back-rest lifting:	0° -75°
Leg-rest lifting:	0° -40°
Reserved trendelenburg:	0° -18°
Trendelenburg:	0° -18°
CPR function	
Height adjustment:	560-890mm
Loading bearing:	220kg
Central Lock System	
200mm Diameter Castors	
4 PCs Bumpers for corners	
5th Castors beneath	
IV pole and Oxygen Cylinder holder	
Foldable Side Rails	



MN-YD003

USA PUMP
Hydraulic Stretcher



Parameters:

Size:	1950*700*615-935mm
Back-rest lifting:	0° -82° (±5°)
Leg-rest lifting:	0° -30° (±5°)
Reserved trendelenburg:	0° -12°
Trendelenburg:	0° -12°
Height adjustment:	615-935mm
Central Lock System for 150mm Castors	
PP Side rails	
IV pole and Oxygen Cylinder holder	
Loading bearing:	220kg



MN-YD004
Classic Hydraulic Stretcher

Parameters:

Size:	1950*700*615-935mm
Back-rest lifting:	0° -82° (± 5°)
Leg-rest lifting:	0° -30° (± 5°)
Resived trendelenburg:	0° -12°
Trendelenburg:	0° -12°
CPR function	
Height adjustment:	615-935mm
Loading bearing:	220kg
X-Ray Cassette for Back Section	
Central Lock System	
Aluminum alloy side rails	
4 PCs Bumpers for corners	
IV pole and Oxygen Cylinder holder	



MN-SD001
Mechanical Transfer
Stretcher



Parameters:

Size:	1930*645*500-900mm
Back-rest lifting:	0° -70°
Height adjustment:	500-900mm
Loading bearing:	220kg
Central Lock System	
150mm Diameter Castors	
5TH Castors beneath	
IV pole and Oxygen Cylinder holder	
ABS Side Rails	
Weight Capacity:	170KG



MN-SD002
Paramount Mechanical Transfer Stretcher

Parameters:

Size:	1930*645*510-850mm
Back-rest lifting:	0° -70°
Height adjustment:	560-890mm
Loading bearing:	220kg
Central Lock System	
150mm Diameter Castors	
5TH Castors beneath	
IV pole and Oxygen Cylinder holder	
Foldable Side Rails	
Weight Capacity:	170KG



MN-SD006
Economical Paramount Type Stretcher



Parameters:

Size:	1930*645*510-850mm
Back-rest lifting:	0° -70°
Height adjustment:	560-890mm
Loading bearing:	220kg
Central Lock System	
150mm Diameter Castors	
5TH Castors beneath	
IV pole and Oxygen Cylinder holder	
Foldable Side Rails.	
Weight Capacity:	170KG



MN-SD003
Mechanical Exchange Stretcher



Parameters:

Size:	1900*640*690-900mm
Back-rest lifting:	0° -70°
Height adjustment:	690-900mm
Central Lock System	
150mm Diameter Castors	
5° castor	
IV pole and Oxygen Cylinder holder	
ABS Side Rails	
Weight Capacity:	250KG

MN-SD004
Mechanical Exchange Stretcher



Parameters:

Size:	3650*640*640-900mm
Back-rest lifting:	0° -70°
Height adjustment:	690-900mm
Central Lock System	
150mm Diameter Castors	
5° castor	
IV pole and Oxygen Cylinder holder	
ABS Side Rails	
Weight Capacity:	250KG





MN-ED001
Deluxe Electrical Stretcher

Parameters:

Size:	1950*700*615-935mm
Back-rest lifting:	0° -82° (±5°)
Reserved trendelenburg:	0° -12°
Trendelenburg:	0° -12°
Height adjustment:	615-935mm
Central Lock System for 150mm castors	
PP Handrails	
4 PCs Bumpers for corners	
IV pole and Oxygen Cylinder holder	
5" castor	



MN-ED002
Economical Electrical Stretcher

Parameters:

Size:	1950*700*615-935mm
Back-rest lifting:	0° -82° (±5°)
Height adjustment:	615-935mm
Central Lock System for 150mm castors	
PP Handrails	
IV pole and Oxygen Cylinder holder	
5" castor	

Specification:

Frame ,side rail and bed base and PU water bath
Pump:American powerpacker hydraulic Pump
Bottom platform is imported PP material
Center-controlled brake system,with four 20cm castors

Function:

Trendelenburg:10°
Anti-trendelenburg:0-10°
Height adjustment:70-100cm

MN-YD005
Hydraulic Shower Stretcher



MN-YD006

Hydraulic Mortuary Stretcher



Specification:

Frame ,side rail and bed base: made of quality stainless steel
Pump:American powerpacker hydraulic Pump
Bottom platform is imported PP material
Center-controlled brake system,with four 20cm castors
equipped with fifth rise and fall guide wheel

Function:

Trendelenburg:10°
Anti-trendelenburg:0-10°
Height adjustment:70-100cm

Stretcher — Non Magnetic Stretcher

MN-AS048 Fixed Height MRI Stretcher



Dimensions:	190 x 55 x 71cm
Packing size:	195 x 62 x 72cm
Bearing weight:	≤159kg
Net weight:	27kg
Gross weight:	33kg

1. For non-magnetic room. Sponge padded stretcher surface
2. If the backrest of the non-magnetic cart needs to be adjusted, rotate the safety handle, and the backrest will be automatically lowered.
3. The non-magnetic trolley mattress can be disassembled by itself.
4. The casters are imported high-quality non-magnetic wheels.

MN-AS049 Height Adjustable MRI Stretcher

technical parameter Highest bit:	190*55*80cm
Lowest bit:	190*55*40cm
net weight:	35kg
Gross weight:	41kg
Load bearing:	180kg
Carton size:	195*62*34cm

1. The trolley surface and the bed body adopt a separate structure
2. Adjustable cart height
3. The guardrails on both sides of the cart can be lowered or raised
4. Infusion pole can be inserted
5. Adjustable head



Medical Trolley — Medical Workstation Trolley

MN-WT001



Size:480*520*900-938-1139mm

MN-WT001A



Size:480*520*900-938-1139mm

MN-WT001B



Size:480*520*900-938-1139mm

MN-WT002



Size:480*520*900-938-1139mm

MN-WT002A



Size:480*520*900-938-1139mm

MN-WT002B



Size:480*520*900-938-1139mm

Medical Trolley — Wireless Nursing Trolley

MN-WT003



Size:520*510*1020mm

MN-WT004



Size:785*475*1000mm

MN-WT005



Size:650*480*950mm
628*475*950mm

MN-WT006



Size:650*480*950mm
626*475*950mm

MN-WT007



Size:650*480*950mm
626*475*950mm

Medical Trolley — Instrument Trolley

MN-IT001



Size:480*520*920mm

MN-IT001A



Size:480*520*920mm

MN-IT001B



Size:480*520*920mm

MN-IT001C



Size:480*520*920mm

MN-IT001D



Size:480*520*920mm

MN-IT002



Size:480*520*920mm

MN-IT003



Size:480*520*920mm

Medical Trolley — Anesthesia Trolley

MN-AC001



Size: 750*475*930mm
850*520*930mm

MN-AC003



Size: 750*475*930mm
850*520*930mm

MN-AC004



Size: 750*475*930mm
850*520*930mm

MN-AC005



Size: 750*475*930mm
850*520*930mm

MN-AC007



Size: 628*475*930mm
650*480*930mm

MN-AC008



Size: 750*475*930mm
850*520*930mm

MN-AC010



Size: 626*475*950mm
650*480*950mm

Medical Trolley — Emergency Trolley

MN-EC001



750*475*930mm

MN-EC001R



750*475*930mm

MN-EC001B



625*475*950mm

MN-EC002



625*475*930mm

MN-EC003



750*475*930mm

MN-EC004



750*475*930mm

MN-EC005



750*475*930mm

MN-EC007



650*475*930mm

MN-EC008



625*475*930mm

MN-EC009



750*475*930mm

MN-EC013



780*550*970mm

MN-MEGA



650*475*930mm

Medical Trolley — Medicine Trolley

MN-DC001
Double Side Drawer Medicine Trolley



Size	850 x 520 x 1010mm
Material	ABS, aluminum, steel. 4 column made of aluminum alloy. With stainless steel guardrail.
Top Side	Surface injection molding process. Two sides with armrest Sunken design prevents stuff falling. With transparent soft glass on the top surface.
Left side	File box.
Right side	ABS double dirt bucket;
Front	Centralized lock. Equipped with 5 medicine boxes with aluminum alloy hand, box inside with dividers and insert label, divided into 25 parts in morning, noon evening and night. Drawer inner with 3*3 dividers which can be separated easily and freely. Drawer handle is dovetail style with label cards.
Back	Centralized lock. Equipped with 5 medicine boxes with aluminum alloy hand, box inside with dividers and insert label divided into 25 parts in morning, noon evening and night.
Bottom	Luxurious universal insertion type mute wheel, two with brake function, castor material for high strength polyurethane. Anti static, hair winding, mobile and flexible and flexible.
Packing Size	859 x 528 x 1050 mm

MN-DC002



Size:750*475*950mm
850*520*1010mm

MN-DC003



Size:750*475*950mm
850*520*1010mm

MN-DC004



Size:750*475*950mm
850*520*950mm

MN-DC005



Size:760*475*950mm
850*520*950mm

MN-DC006



Size:850*520*1025mm

Medical Trolley — Infusion Trolley

MN-IC001



Size:750*475*930mm
850*520*930mm

MN-IC002



Size:625*475*930mm
675*480*930mm

MN-IC003



Size:750*475*930mm
850*520*930mm

MN-IC004



Size:750*475*930mm
850*520*930mm

MN-IC005



Size:750*475*930mm
850*520*930mm

MN-IC006



Size:750*475*920mm

Medical Trolley — Treatment Trolley

MN-TC001



Size:750*475*930mm
850*520*930mm

MN-TC002



Size:625*475*930mm
675*480*930mm

MN-TC003



Size:750*475*930mm
850*520*930mm

MN-TC004



Size:750*475*930mm
850*520*930mm

MN-TC005



Size:750*475*930mm
850*520*930mm

MN-TC006



Size:750*475*930mm
850*520*930mm

Medical Trolley — Linen Trolley

MN-LT001



Size: 588*428*890mm

MN-LT002



Size: 800*590*890mm

MN-LT003



Size: 588*428*890mm

MN-LT004



Size: 800*590*890mm

MN-LT005



Size: 625*475*930mm
675*480*930mm

MN-LT006



Size: 625*475*930mm
675*480*930mm

MN-LT007



Size: 1005*540*936mm

MN-LT008



Size: 988*541*936mm

Medical Trolley — Patient Record Trolley

MN-PRT001



Size: 588*428*890mm

MN-PRT002



Size: 800*590*890mm

MN-PRT003



Size: 588*428*890mm

MN-PRT004



Size: 800*590*890mm

MN-PRT005



Size: 588*428*890mm

MN-PRT006



Size: 588*428*890mm

MN-PCH001



Patient Chart Holder

Medical Trolley — Utility Trolley

MN-101A



Size:539*366*860mm

MN-101G



Size:539*366*923mm

MN-101H



Size:

MN-101E



Size:539*366*860mm

MN-101K



Size: 539*366*923mm

MN-101J



Size:539*366*923mm

MN-201C



Size:640*456*860mm

MN-201E



Size:640*456*858mm

Medical Trolley — Steel-Plastic Trolley

MN-SPT001



Size:600*410*985mm
670*475*985mm
730*480*985mm

MN-SPT002



Size:600*410*985mm
670*475*985mm
730*480*985mm

MN-SPT003



Size:600*410*985mm
670*475*985mm
730*480*985mm

MN-SPT004



Size:600*410*985mm
670*475*985mm
730*480*985mm

Examination Couch

MN-JCC001



Material: Stainless Steel Examination Couch
Size: 1900*600*650mm

MN-JCC002



Material: Powder Coated Steel
Size: 1900*600*650mm

MN-JCC003



Material: Powder Coated Steel
Size: 1900*600*650mm

MN-JCC005 Foldable Stainless Steel Stretcher

Product specifications:	1900*650*650mm
Material:	All stainless steel bed frame
Sponge pad, eco-friendly leather case	
Packaging:	1150*700*450mm
Load capacity 100 kg	
NW:	24kg
GW:	32 kg



MN-JCC004 Electrical Examination Couch

Dimension:	1900*600*600mm~790mm
Material:	Powder Coating Steel, Leather
Thickness of Steel:	1.0mm
Thickness of Leather:	60mm
Leather type:	Water proof cover
Wheels:	4 units of noiseless wheels with brakes
Motor Brand:	T-Motion
Weight capacity:	180Kgs
Control system:	handheld control



MN-JCC006 Electrical Examination Couch

Dimension:	1900*600*420mm~700mm
Material:	Powder Coating Steel, Leather
Thickness of Steel:	0.8mm
Thickness of Leather:	60mm
Leather type:	Water proof cover
Wheels:	4 units of noiseless wheels with brakes
Motor Brand:	T-Motion
Weight capacity:	180Kgs
Control system:	handheld control
Back up:	0~80°



Medical Chair

MN-BDC001 Five Function Electrical Dialysis Chair

Total Length:	190cm
Seat Width:	60cm
Width Including Armrest:	88cm
Weight of Chair:	95kg
Height Adjustment:	56-82cm
Backrest Adjustment:	-12° ~ 75°
Legrest Adjustment:	-80° ~ 12°
Trendelenburg Position:	12°
CPR function	
Motors:	3 Linak Motors
Standard Accessories:	Tray Table, I.V.pole
Colors:	Green Blue Brown



MN-BDC002 Economical Electrical Dialysis Chair (3 Imported Motors)

Dimension:	1900mm*620*550mm
Backrest adjustable:	-10° ~75° ±5
Leg adjustable:	-80° ~12° ±5
Complete size:	192*65*56cm
Height adjustable:	560-820mm
Weight load:	200kg
Frame material:	Steel
Mattress material:	PVC
Wheel:	4 silent wheels with brakes
Package Size:	1520*800*620mm



MN-BDC003
Mechanical
Dialysis Chair

Overall length:	1880 mm
Width:	600 mm
Seat Height:	530 mm
Backrest adjustment:	12° ~75°
Legrest Adjustment:	-80° ~12°
Caster 4 x ø 100mm with separate brakes	
Cushion PU leather	
Frame Q235 steel	
Weight of Chair:	80 KG
Load Capacity:	200 KG
Standard Accessories	Table or tray, I.V.pole
Color Optional:	Green, Blue, Ivory, Coffee



MN-BDC003B
Electrical Dialysis Chair
(2 Imported Motors)

Total Length:	1880mm
Seat Width:	60cm
Height:	53cm
Width Including Armrest:	88cm
Weight of Chair:	80kg
Backrest Adjustment:	0° ~ 75°
Legrest Adjustment:	-80° ~ 0°
Trendelenburg and Anti-Trendelenburg:	12°
Safe maximum load:	240kg
Standard Accessories:	I.V.pole
Colors:	Green Blue Brown



Medical Chair — Elderly Chair

MN-BDC004 Elderly Chair (Three Positions)

Size(chair):	110 * 66 * 118cm
table size :	65 * 38cm
1pcs/Carlon Size:	95 * 70 * 72cm
N.W.:	40kg
G.W.:	46kg
5" castor (omni-directional rear castor with brakes)	
weight limit:	120KG
blue/red/jade	



MN-BDC005 Elderly Chair Free Positions Adjustable

Size(chair):	110 * 77 * 128cm
table size :	48 * 26cm
1pcs/Carlon Size:	97 * 82 * 75cm
N.W.:	44kg
G.W.:	50kg
5" castor (omni-directional four casters with brakes)	
weight limit:	120KG
blue/red/jade	



MN-BDC006 Elderly Chair (Three Positions with Pedals)

Size(chair):	140 * 73 * 118cm
table size :	65 * 38cm
1pcs/Carlon Size:	74 * 94 * 72cm
N.W.:	45kg
G.W.:	50kg
5" castor (omni-directional rear castor with brakes)	
weight limit:	120KG
blue/red/jade	



Medical Chair — Accompany Chair

MN-PHY001 Basic Accompany Chair

Model:	MN-PHY001
Material:	Painted Steel,PVC Leather
Size(open):	190 x 62 x 42cm
Size(closed):	65 x 62 x 58cm
Carton Size:	120 x 62 x 23cm
N.W:	22.5kg



MN-PHY002 Basic Accompany Chair

Model:	MN-PHY002
Material:	Stainless Steel ,PVC Leather,wooden armrest
Size(open):	190 x 62 x 42cm
Size(closed):	65 x 62 x 58cm
Carton Size:	120 x 62 x 23cm
N.W:	18kg



MN-PHY003 Hidden Model Accompany Chair

Model:	MN-PHY003
Material:	Stainless Steel ,PVC Leather,wooden armrest
Size(open):	190 x 62 x 20cm
Size(closed):	74 x 62 x 35cm
Carton Size:	74 x 66 x 38cm
N.W:	18kg



MN-PHY004 Advanced Accompany Chair

Model:	MN-PHY004
Material:	Steel ,PVC Leather,wooden armrest
Size(open):	186 x 67 x 41cm
Size(closed):	66 x 67 x 40cm
Carton Size:	74 x 66 x 38cm
N.W:	32kg



MN-PHY005
High Level Accompany Chair

Model:	MN-PHY005
Material:	Steel ,PVC Leather,Aluminum Alloy armrest
Size(open):	206 x 65 x 45cm
Size(closed):	78 x 65 x 45cm
Carton Size:	130 x 66 x 38cm
N.W:	38kg



MN-PHY006
Deluxe Accompany Chair

Model:	MN-PHY002
Material:	Stainless Steel ,PVC Leather,wooden armrest
Size(open):	190 x 62 x 42cm
Size(closed):	65 x 62 x 58cm
Carton Size:	120 x 62 x 23cm
N.W:	18kg



MN-PHY007
Deluxe Accompany Couch

Model:	MN-PHY007
Material:	mute wheels,steel frame coated,spring
Size(open):	204 x 71 x 43cm
Size(closed):	80 x 71 x 43cm
Carton Size:	77*60*34 74*74*17
N.W:	36kg



MN-PHY008
Deluxe Accompany Couch

Model:	MN-PHY008
Material:	mute wheels,steel frame coated,spring
Size(open):	208 x 102 x 43cm
Size(closed):	80 x 102 x 43cm
Carton Size:	92*80*43
N.W:	36kg



Medical Chair — Infusion Chair

MN-SYY001 Infusion Chair

Model:	MN-SYY001
Material:	Painted Steel PVC Leather
Size(open):	77 x 68 x 108cm
Carton Size:	92 x 62 x 35cm
N.W:	22kg



MN-SYY002 Stainless Steel Infusion Chair

Model:	MN-SYY002
Material:	Stainless Steel PVC Leather
Size(open):	77 x 68 x 108cm
Carton Size:	92 x 62 x 35cm
N.W:	22kg



MN-SYY003 Sliding Pedal Infusion Chair

Model:	MN-SYY003
Material:	Stainless Steel PVC Leather
Size(open):	77 x 68 x 108cm
Carton Size:	92 x 62 x 35cm
N.W:	21.5kg



MN-SYY004 Simple Infusion Chair

Model:	MN-SYY004
Material:	Stainless Steel PVC Leather
Size(open):	82 x 70 x 102cm
Carton Size:	90 x 56 x 30cm
N.W:	25kg



MN-SYY005 Deluxe Infusion Chair

Model:	MN-SYY005
Material:	Painted Steel PVC Leather
Size(open):	90 x 75 x 110cm
Carton Size:	100 x 60 x 48cm
N.W:	32kg



MN-SYY007 Luxury Infusion Chair

Model:	MN-SYY007
Material:	Painted Steel PVC Leather,gas
Size(open):	90 x 75 x 110cm
Carton Size:	100 x 60 x 48cm
N.W:	32kg



Medical Chair — Waiting Chair

MN-WC001



Size:175*67*78.5cm
Chromed plated steel armrest,
Epoxy painted steel seat Three seats

MN-WC002



Size:175*67*78.5cm
Epoxy painted steel seat
Three seats

MN-WC003



Size:175*67*78.5cm
Epoxy painted steel seat
Three seats

Bedside Screen



MN-PF001

Model: MN-PF001
Material:Stainless steel
Three folded screen



MN-PF002

Model: MN-PF002
Material:Stainless steel
Two folded screen

Bedside Cabinet

MN-BL001 ABS Cabinet



Size: 480*480*760mm
Material: Fresh ABS, Blue Color.

MN-BL002 ABS Cabinet



Size: 570*500*730cm
Material: Fresh ABS, One Door, One Drawer

MN-BL003 ABS Cabinet



Size: 475*475*809-820-840mm

MN-BL005 ABS Cabinet



Size: 475*475*809-820-840mm

MN-BL006 ABS Cabinet



Size: 480*480*809-820-840mm

MN-BL007 ABS Cabinet



Size: 480*480*809-820mm

Overbed Table

MN-OVT001



Size: 900X450X720/1020mm
Material: ABS, Powder Coating Steel, Gas Spring.

MN-OVT002



Size: 900X450X720/1020mm
Material: ABS, Powder Coating Steel, Gas Spring.

MN-OVT003



Size: 900X450X720/1020mm
Material: Fire Proof Board, Powder Coating Steel, Gas Spring

MN-OVT004



Size: 900*450*650-900mm
Material: ABS plastic desktop steel

MN-OVT005



Size: 800*400*725-995mm
Material: ABS Engineering plastic
Aluminum alloy
cold steel spray

Mattress

MN-M001



Sponge Mattress with water proof cover

MN-M002



PU cover Mattress

MN-M003



Air mattress

MN-M004



Air Mattress

MN-M005



Air Mattress

MN-M006



Air Mattress

Infusion Pole

MN-IV007



Material: Stainless steel
Lifting mode: knob type
Height :1.1m-2.1m

MN-IV008



Material: Stainless steel
Lifting mode: knob type
Height :1.1m-2.1m

MN-IV009



Material: Steel forging base
Lifting mode: knob type
Height :1.5m - 2m

MN-IV010




Material: Steel forging base
PP dust cover
Lifting height: 1.2m - 2m
Weight :5kg

MN-IV011



Material: Steel forging base
PP dust cover
Lifting height: 1.2m - 2m
Weight :5kg

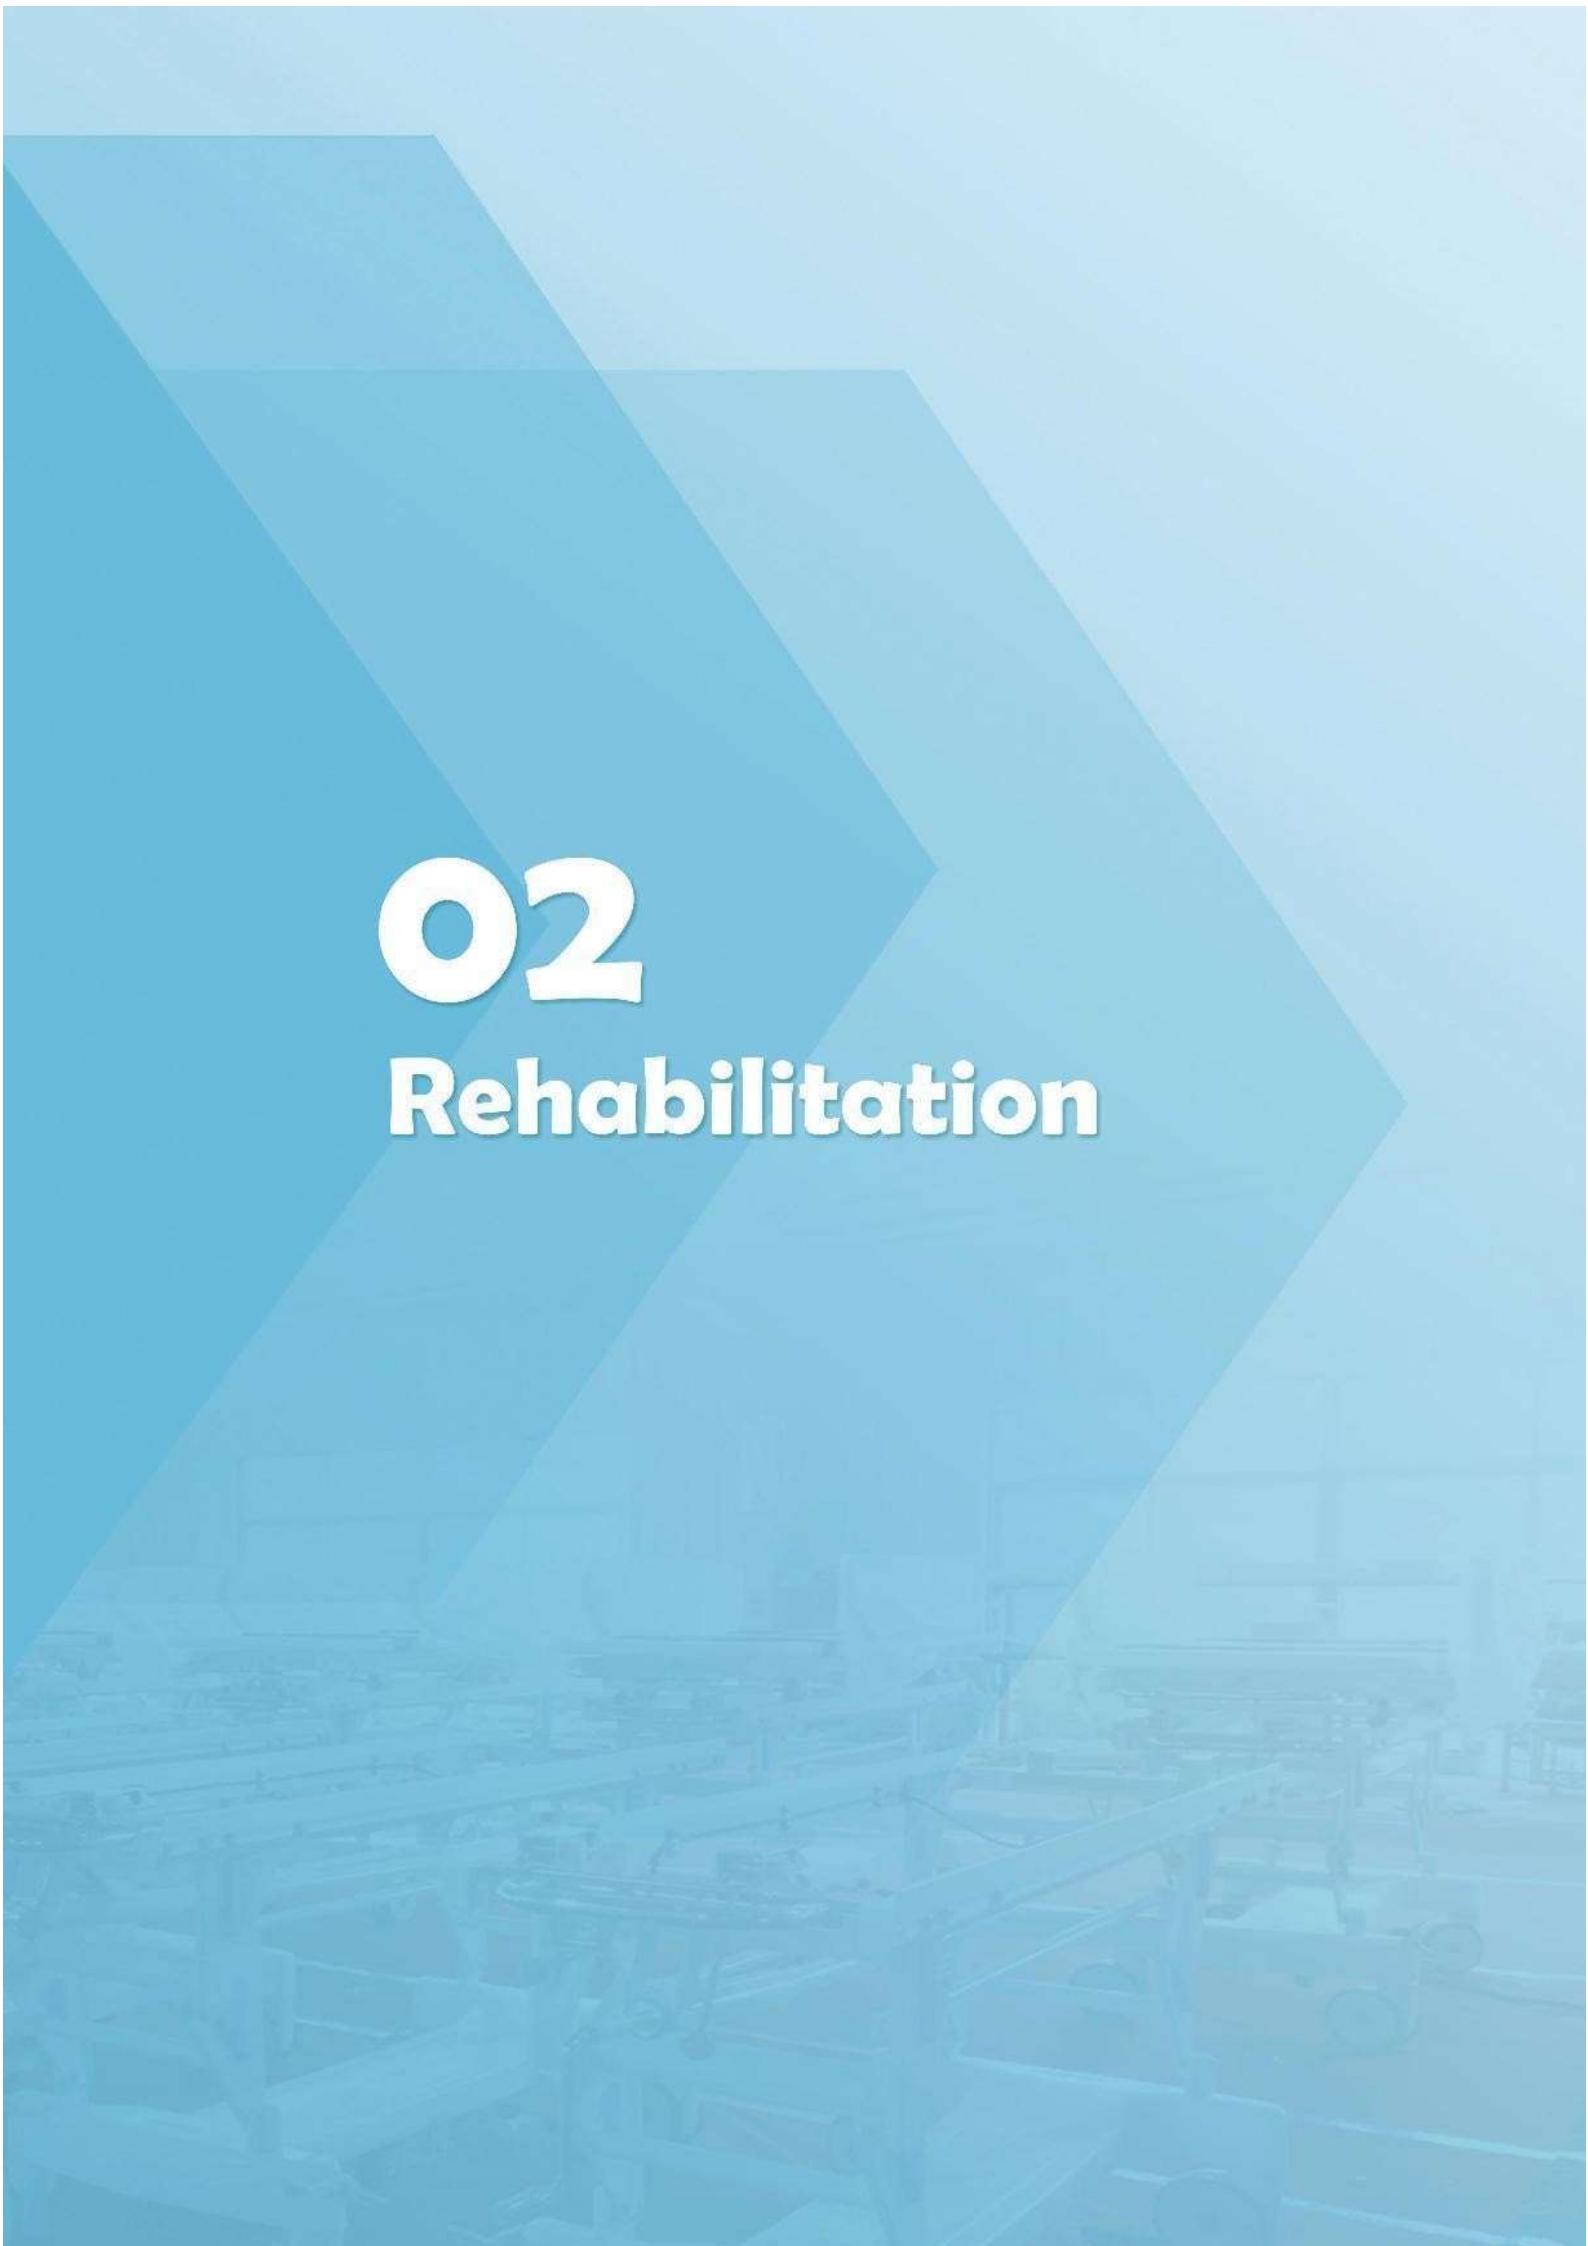

02

Rehabilitation

Wheel Chair

MN-LY001



MN-LY002



MN-LY003



MN-LY004



MN-LY005



MN-LY006



MN-LY010



MN-LY011



MN-LY012



Patient Transfer Chair

MN-YWJ001
Patient Transfer Chair



MN-YWJ002
Electrical Transfer Chair



MN-YWJ003
Electrical Transfer Chair



Nursing Bed

MN-HL001

Five Function Wooden Nursing Bed



Technical Parameter

Size: L215*W102*H38-79cm
Loading capacity: 180kg

Technical Configuration

Motor	4pcs
Wooden Head&Foot Board	1set
Wooden Side Rails	2pcs



Crutch

MN-GZ001



MN-GZ002



MN-GZ003



Walking Aid

MN-WA001



MN-WA002



Bath Chair

MN-XZY001



MN-XZY002



MN-XZY003



Commode Chair

MN-DBY001



MN-DBY002



MN-DBY003



MN-DBY004



Electric Patient Lift

MN-EPL001

Arm Length	990mm
Leg Length	1190mm
Overall Width	590mm
Base Open Width	860mm
Hook Height	720-1730mm
Push Handle Height	1140mm





03

Operating Room Equipment

Operating Table

MN-OR001 Multi Function Electrical Operating Table



Specification:

Length/Width:	2000mm/550mm
Elevation(up/down):	680mm/930mm
Trendelenburg:	≥ 25°
Reverse Trendelenburg:	≥ 25°
Lateral Tilt(left/right):	15° /15°
Head Rest(up/down):	45° /90°
Footplate(up/down&horizontal positioning):	90° 90° 15°
Backplate(up/down):	75° /20°
Kidneybridge:	110mm
Sliding:	300mm
Power:	220v,50Hz,1.0kW

Accessories:

- 1 Anaesthetic Screen
- 2 Shoulder Rest
- 2 Arm Support
- 2 Body Support
- 2 Knee Crutch
- 1 Mattress

MN-OR002 Deluxe Electrical Operating Table

Size: 2100mm*550mm*710mm
Material: 304 Stainless Steel
Electrically controlled by Imported Motors



MN-OR003 Electroco-Hydraulic Operating Table

Size: 1960mm*500mm*690mm
Material: 304 Stainless Steel
Controlled by Imported Electro-Hydraulic System

MN-OR011 Luxury Hydraulic Operating Table

Size: 2000mm*500mm*690mm
Material: 304 Stainless Steel
Controlled by Imported German Hydraulic-Mechanical System.
Castor Brand: TENTE from Germany





MN-OR012 Manual Operating Table

Size: 2010mm*500mm*760mm
Material: 304 Stainless Steel
Controlled by Hydraulic-Mechanical System.

MN-OR0013 Economical Manual Operating Table

Size: 1960mm*500mm*690mm
Material: 304 Stainless Steel
Controlled by Imported Electro-Hydraulic System



MN-OR004 Five Function Electric OR Table (Sliding Horizon)



MN-OR004A Four Function Electric OR Table



MN-OR004B Three Function Electric OR Table



Table length and width:	2040 (± 20) \times 520 (± 20) mm
Table height:	minimum 680 (± 20) — 1020 (± 20) mm (electric)
The table tilt forward:	25 \pm 2°
backward:	20 \pm 2°
left:	23 \pm 2°
right 23:	\pm 2° (electric)
Bed back plate folding up:	$\leq 75 \pm 3$ °
folding down:	$\leq 15 \pm 3$ ° (electric)
The leg plate of the bed body folds down:	90 \pm 5°
The axial type can be expanded by 180 °	

MN-OR006 Economical Manual Operating Table



Length:	2000mm, width:	480mm, height:	790mm
Lifting stroke:		≥ 250mm	
forward tilt:		≥ 30 °	
backward tilt:		≥ 20 °	
left and right tilt:		≥ 18 °	
Backboard folding up:		≥ 80 °	
Backboard fold down:		≥ 18 °	
Upward folding of head plate:		≥ 45 °	
Head plate folding down:		≥ 90 °	
Waist rise:		≥ 115mm	
Leg plate folding down:		≥ 90 °	

MN-OR010 Electrical Ophthalmology Chair

Length/Width:	2000mm/500mm
Lowest height of table top:	≤ 500mm
Height adjustment range:	≥ 240mm
Head rest adjustment:	≥ 180mm
Arm support adjustment:	≥ 180mm
Power:	220v,50Hz,1.0Kw



MN-OR010S Economical Electrical Ophthalmology Chair

Table length and width:	2050 (± 20) × 550 (± 20) mm;
Table height: minimum	550 (± 20) — 750 (± 20) mm (electric);
(Optional) Fold on the back of the bed:	≤ 65 °
Rated load-bearing:	150kg;

MN-OC001 Electric Ophthalmology Chair

Electrical Pedal Control	
Power:	220v,50Hz,1.0Kw



Dental Chair



MN-KS-R3

180 degree turntable side box convenient for treatment and repair
Metal backrest easy to install and uninstall
Wood grain design acrylic cuspidor panel
S-shape cushion design reach to ergonomics, making patient relax
End of cushion is composite board with metal support resist Corrosion
Metal steel plate for motor cover
6 bulb led lamp with white and yellow color
Taiwan Timotion motor
Taiwan air and water tubing
Throttle type multifunction electric foot pedal
Separated air and water system on side box
Adjust dentist stool on unit



MN-KS-R4

The standard configuration is PU cushion, detachable steel backrest.
Instrument tray arm with 180 degree rotation, agile and convenient.
Reflected led sensor lamp.
All-new plastic case, all-new ABS material with PMA material
coating layers: wear-resistant, UV-resistant and corrosion resistant
Luxury side control acrylic keyboard cover with 9 memory function.
electric valve, Nano-consolidated spittoon, Energy-saving Module
Taiwan polyether Water and air tubing
Widened and consolidated chair powered by Denmark Linak Motor,
ensuring a smooth and silent operation
x-ray film viewer
2 in 1 control box with USB connector
Emergency Stop function
Stainless steel water supply
Metal High Power Suction
One-button Water-Air-Electricity Switch



MN-KS-D213

Built-in handpiece water purification system
Computer controlled noiseless DC motor
New type 6 bulb led sensor lamp
New 6-seat luxury button down tray with stainless steel tray
Metal backrest & Turnable glass spittoon
Dismountable suction filter, easy to replace and clean
Scratch-resistance cushion and backrest control system
Movable armrest & Taiwan polyether tubing
Main control switch for power, water and air
Three way syringes 2PCS (warm/cold each)
Instrument tray with pneumatic brake
Separated air and water system with orderliness tubing
Powerful suction and saliva ejector
D.C. X-film viewer
Multifunction foot control

Operating Lamp



MN-LED50 Adjust Color Temperature

Illuminance $\geq 140,000\text{Lux}$
Colour temperature $3800 \pm 500\text{K}$ $4400 \pm 500\text{K}$ $5000 \pm 500\text{K}$
Colour reduction index(Ra) 95
Total irradiance 534W/m^2
Size of light field 250–300mm
Service life of illuminant 50,000h
Power supply voltage AC110–240V 50/60Hz
Lowest height of installation 2900mm
Total power consumption 60W
Total LED bulb quantity 72 pcs (12*6)
Illuminance depth $\geq 1400\text{mm}$
LED bulb $3.3\text{mW}/\text{m}^2\text{lx}$
ENDO YES

MN-LED5050



MN-LED50M



MN-LED50MB



MN-LED70 Adjust Color Temperature



Illuminance $\geq 160,000\text{Lux}$
Colour temperature $3800 \pm 500\text{K}$ $4400 \pm 500\text{K}$ $5000 \pm 500\text{K}$
Colour reduction index(Ra) 95
Total irradiance 544W/m^2
Size of light field 250–300mm
Service life of illuminant 50,000h
Power supply voltage AC110–240V 50/60Hz
Lowest height of installation 2900mm
Total power consumption 80W
Total LED bulb quantity 108 pcs (18*6)
Illuminance depth $\geq 1400\text{mm}$
LED bulb $3.3\text{mW}/\text{m}^2\text{lx}$
ENDO YES

MN-LED7070



MN-LED70M



MN-LED70MB



MN-LED7050



MN-LED7050-TV



MN-OL3
(Adjust color temperature)(LED)
Shadowless Operating lamp

Illuminance $\geq 120,000\text{Lux}$
Colour temperature
 $3500 \pm 200\text{K}/4000 \pm 200\text{K}/4500 \pm 200\text{K}/5000 \pm 200\text{K}$
Colour reduction index(Ra) 96
Illuminance depth 1020mm
Total irradiance 380W/m
Size of light field 200–350mm
Lowest height of installation 2900mm
Rated power of bulb 3.2V/1W
Service life of illuminan $\geq 50000\text{h}$
Power supply voltage AC110–240V,50/60Hz
Total LED bulb quantity 110 pcs
Total power consumption 60W

MN-OL3+3



MN-OL3W



MN-OL3M



MN-OL3MB





MN-OL5
(Adjust color temperature)(LED)
Shadowless Operating lamp

illuminance $\geq 140,000\text{Lux}$
Colour temperature
 $3500 \pm 200\text{K}/4000 \pm 200\text{K}/4500 \pm 200\text{K}/5000 \pm 200\text{K}$
Colour reduction index(Ra) 96
illuminance depth 1150mm
Total irradiance 510W/ π
Size of light field 200–350mm
Lowest height of installation 2900mm
Rated power of bulb 3.2V/1W
Service life of illuminant $\geq 50,000\text{h}$
Power supply voltage AC110–240V.50/60Hz
Total LED bulb quantity 184 pcs
Total power consumption 70W

MN-OL5+5



MN-OL5C



MN-OL3+5



MN-OL3+5-TV



MN-LED7050C Operating lamp



Illuminance (adjustable) 40000–180000 Lux 30000–160000 Lux
Illumination of single shutter ≥70000 Lux ≥36000 Lux
Illumination of double shutter ≥60000 Lux ≥66000 Lux
Irradiance of the illuminated surface ≥410W/m ≥480W/m
Number of bulbs Average life of bulb 80,48
Average life of bulb 80000h ≥80000h
Color temperature (adjustable) 3700K–5000K
Display index (adjustable) 85–98
Focus depth ≥1200mm ≥1200mm
Spot diameter 160–280mm (adjustable)
Brightness adjustment 1%–100% 1%–100%
Temperature rise of the head of the operator <1°C<1°C
Power supply voltage AC100–240V 50/60HZ

MN-LED70C



MN-LED50CM



MN-LED7050R Operating lamp



Technical parameters Lamp cap 700/500
Illumination (adjustable) 30000–160000 Lux
Number of bulbs: 2
Bulb Type Bulb
Average life of bulb ≥ 5000h
Color temperature (adjustable) 3700K ~ 5000K
Display index (adjustable) 85 ~ 96
Focus depth ≥ 1200mm
Spot diameter 160–280mm (adjustable)
Brightness adjustment 1% ~ 100%
Temperature rise of the head of the operator < 1.5 °C
Power supply voltage AC100–240V 50/60HZ

MN-LED5+3



Illumination (adjustable): 40000-180000Lux
Number of bulbs: 61+39
Bulb Type: LED
Average life of bulb: ≥8000h
Color temperature (adjustable): 3700K-5000K
Display index (adjustable): 85-98
Focus depth: 50-180cm
Spot diameter: 160-280mm
Brightness adjustment: 1%-100%
Power consumption (W): 65
Temperature rise of the head of the operator: <1°C
Power supply voltage: AC100-240V 50/60HZ

MN-LED5M



MN-LED3M



MN-LED6060-TV



Illuminance: ≥160.000Lux ≥160.000 Lux
Colour temperature: 3800K+300K;4400K+300K;5000K+300K
Spot diameter: 180-250mm
Input Power: 200VA
LED secondary light-emitting tube power: 3.2V13W
Number of LED secondary light-emitting tubes: 120
ENDO: ≥10000 Lux
GL: ≥12000 Lux
Color rendering index(Ra): 96sRa>100
Total irradiance: ≤500W/m²
Illumination depth: 20%: Not less than 1070mm.
60%: Not less than 560mm



MN-EXM10

Illuminance (Lux): 30000
Color temperature (K): 3500-5000
Spot diameter: ϕ 50mm
Illumination depth: \geq 350mm
Safety Type: Class I Type B
Power consumption: 10W
Rotation angle: 360°



MN-EXM10M

Illuminance (Lux): 30000
Color temperature (K): 3500-5000
Spot diameter: ϕ 50mm
Illumination depth: \geq 350mm
Safety Type: Class I Type B
Power consumption: 10W
Rotation angle: 360°



MN-EXM004

Name: Examination lamp
Supply Voltage: 220v
Power: 3W
Color temperature: 4500K
Illumination(50cm): 20000Lux
Height adjust
Lifetime: 20000h

Examination Lamp



MN-EXM002

Illumination: $\geq 30000K$
Mains voltage: AC220V $\pm 10\%$ 50Hz (Customize)
Lifetime: 50,000 hours
Power: 9V
battery lighting last 3-4 hours
Packing Size: 930*480*100mm
GW: 5KG
NW: 4 KG



MN-EXM003

Illumination: $\geq 40,000LX$ (at 1m distance)
Color temperature: 4500K $\pm 500K$
Mains voltage: AC220V $\pm 10\%$ 50Hz
Bulb voltage: AC24V Bulb power
Input power: 180VA
Packing Size: 970*670*740mm
GW: 60KG

Medical Pendant



MN-MP001 Single Arm Medical Pendant

Detail:

Model: MN-MP001
Length: 1 Meter
Rotation: 340 degree
Loading capacity: 150Kg
Color: Blue
Gas Outlet: Germany, Britain, USA, French Standard
Instrument Shelf , One drawer.
Material: High Density Aluminum with Powder coating surface treatment.



MN-MP002 Double Arm Medical Pendant

Detail:

Model: MN-MP001
Length: 1 Meter
Rotation: 340 degree
Loading capacity: 150Kg
Color: Blue
Sockets: 6 PCs
Gas Outlet: Germany, Britain, USA, French Standard Optional
Three Instrument Shelf , Two drawer.
Two IV Pole
Material: High Density Aluminum with Powder coating surface treatment.



MN-MP003 Single Arm Pendant

Detail:

Model: MN-MP003
Length: 1 Meter
Rotation: 340 degree
Loading capacity: 150Kg
Gas Outlet: Germany, Britain, USA, French Standard Optional
Three Instrument Shelf , Two drawer.
Material: High Density Aluminum with Powder coating surface treatment.

Bed Head Unit



MN-BHU001

Blood and Covid Vaccine Freezer

MN-6L
Transport Cooler Box



MN-50L
Vaccine Freezer



MN-60L
Ultralow Temperature
Vaccine Freezer



MN-150L
Vaccine Freezer



MN-680L
Vaccine Freezer



MN-1300L
Triple Door
Vaccine Freezer



Anesthesia Machine



MN-AN001

Ventilation mode: IPPV, A/C, PCV, SIMV, SIGH, MANUAL
Tidal volume (Vt): 0.20~1500mL
I:E: 4:1~1:8
Source: O₂, N₂O, O₂, AIR
Oscillogram: P-T, F-T, P-V loop, V-T, ETCO₂—T



MN-AN002

Gas source: O₂, N₂O, Air
Ventilation mode: IPPV, A/C, SIMV, SIGH, MANUAL
Tidal volume (Vt): 0.20~1500mL
I:E: 2:1~1:6
Oscillogram: P-T, F-T, P-V loop



MN-AN003

Gas source: O₂, N₂O, Air
Ventilation mode: IPPV, A/C, V-A/C, P-SIMV, V-SIMV
PCV-PC, PCV-VG, PSV, SIGH, MANUAL
Tidal volume (Vt): 0.20~1500mL
I:E: 4:1~1:8
Oscillogram: P-T, F-T, V-T, P-V loop, P-F loop, F-V loop



MN-AN006

Oxygen Supply Flow Rate: 25~75L/min
Inspiratory Pressure Trigger: -10~10cmH₂O (electronically controlled)
SIGH: 1 sigh breath in every 80~160 breaths
Vaporizer Concentration Ranges: 0~5%
Vaporizer Slots: Double PA-I type slots
Gas Supply Pressure: O₂: 0.32MPa~0.6MPa; N₂O: 0.32MPa~0.6MPa

MN-AN007

Gas source: O₂, N₂O, Air
Ventilation modes: IPPV, A/C, SIMV;
Tidal volume (Vt): 0.20~1500mL
I:E 4:1~1:8



MN-AN010

Gas source: O₂, N₂O, Air
Ventilation modes: IPPV, A/C, SIMV;
Tidal volume (Vt): 0.20~1500mL
I:E 4:1~1:6



Ventilators

Ventilators Suitable for various kinds of medical institutions for cardiopulmonary resuscitation respiratory support. Acute respiratory failure caused by various reasons or incomplete oxygenation dysfunction. Intra-operation, post-operation respiratory support, other respiratory treatment.



MN-VEN001

Ventilation modes:
IPPV, A/C, SIMV; SPONT/CPAP;
High oxygen concentration alarm: 19%~100%
Low oxygen concentration alarm: 18%~99%
Input power: 40VA



MN-VEN002

Screen: 15" TFT LCD touch screen
Ventilation mode: PRVC, APRVDUOLEVEL, V-SIMV, P-SIMV, IPPV, A/C, PCV, PSV, SPONT/CPAP, SIGH, MANUAL
Tidal volume (Vt): 0.20~2000mL
Alarm and protection: 14 kinds of alarm and protection functions
P-T, F-T, V-T, ETCO-T, P-V loop F-V loop, P-F loop



MN-VEN003

Ventilation modes: IPPV, A/C, SIMV; SPONT/CPAP, MANU
Gas source: O2
Pressure: 280kPa~600kPa
Power frequency: 50Hz ± 1Hz
Input power: 40VA

MN-VEN004



MN-VEN005



MN-VEN006



Obstetric Table&Bed



MN-OR008 Mechanical Obstetric Table

Length/width	1780mm/600mm
Elevation(up/down)	680mm/880mm
Seat Plate(up/down)	20° / 8°
Back Plate(up/down)	45° / 7°
Power	220v,50Hz,1.0kw



MN-OR015 Mechanical Obstetric Table

304 stainless steel	
Length:	1740mm Width590mm
Elevation(up/down):	620mm/900mm
Trendelenburg:	≥8°
Anti-trendelenburg:	≥20°
Back Plate(up/down):	45° /10°
1 Anaesthetic Screen	
2 Shoulder Rest	
2 Arm Support	
2 Body Support	



MN-DB001 VIP Deluxe Electrical LDR Bed

Night light can lighten the ground automatically.
The battery backup offers emergency use when the main power is off.
The low bed position gives the mothers stable support.
The bed can reach varies labor positions to comfort different lying-in women.



MN-DB002 Economical Electrical LDR Bed

Size:	2050 * 980 *(580-950)mm
Back-rest Adjustment:	0-70°
Reverse Trendelenburg:	0-5°
Trendelenburg:	0-12°
Height Adjustment:	580-950mm



MN-DB003 Hydraulic Delivery Bed

dimension: Length 1815mm, width 880mm
Min. & Max. table height: 580mm-950mm(exclude the cushion)
Back section turning: $\geq 70^\circ$
Trendelenburg and reverse trendelenburg; reverse trend $>5^\circ$
trend $>12^\circ$
Leg section telescope: 550mm
Castor Diameter: 125mm



MN-OR009 Simple Stainless Steel Obstetric Table

Length/Width/Height 1900mm/600mm/750mm
Back Section Up/ Down $\geq 60^\circ$ / $\geq 10^\circ$
Leg Section Down 75 $^\circ$



MN-OR014 Electric Gynaecology Chair

Table top dimension: length 1450mm, width 520mm
Min. & Max. table height: 420mm - 1070mm
Trendelenburg&anti-trendelenburg: $\geq 30^\circ$, $\leq 30^\circ$
Footrest slide distance: 100mm
Auxiliary table slide distance: 360mm
Power: AC 220V 50HZ



MN-OR014S Electric Gynaecology Chair

Gynaecology Chair
Table top dimension: 1110mm, width: 565 mm
Min. & Max. table height: 560-1130mm
Filth basin slide distance: 160 mm
Power: AC 220V 50 HZ



MN-OR019
Manual Obstetric Table

Table length and width: 1850 (± 20) x 600 (± 20) mm
Table height: minimum minimum 680 (± 20) — 920 (± 20) mm (electric)
The bed is tilted forward $\geq 20^\circ$ and backward tilted $\geq 25^\circ$ (manually)
Folding on the back panel: $\geq 75^\circ$ Folding down: $\geq 10^\circ$ (manual)
Power supply: 220V 50Hz
Rated load bearing: 150kg



MN-OR020
Economical Electric Obstetric Table

table length and width: 1850 (± 20) x 600 (± 20) mm
table height: lowest minimum 680 (± 20) — 920 (± 20) mm (electric)
Bed tilted forward $> 30^\circ$ backward 325° (electric)
Backboard folding up: $\geq 75^\circ$ Folding down: $\geq 10^\circ$ (electric)
Power supply: 220V 50Hz
rated weight: 180kg



MN-OR021
Economical Electric Obstetric Chair

Back panel: up fold $\leq 75^\circ$, down fold $\geq 18^\circ$ (electric)
Backward tilt: $\geq 25^\circ$ (electric)
Table: 1450mm x 590mm ± 20 mm
Table lift: 580mm—1000mm ± 20 mm (electric)
Power supply, power: 220V/50Hz, 150VAB

Infant incubator



MN-ICB001 Basic Infant Incubator

Size:	98*63*74cm
NW:	15 Kg
GW:	30 kg
Power supply:	AC110/220V 60/50Hz
Power input:	650VA
Air temperature control range:	25°C~37°C 37.1°C~38°C
Temperature fluctuation:	± 0.5°C
Uniformity of mattress temperature:	≤ 0.8°C
Warm-up time(from 25°C):	<30min



MN-ICB002 High Level Infant Incubator

Size: 112*66*96cm
NW: 80Kg GW: 110Kg
Power supply AC110/220V 60/50Hz
Power input 650VA
Environment temperature 20°C ~ 30°C
Operating condition Environment relative humidity 30% ~ 75%
Environment air velocity of flow < 0.3m/s
Air temperature control range 25°C ~ 37°C 37.1°C ~ 38°C
Skin temperature control range 32°C ~ 37°C 37.1°C ~ 38°C
Skin temperature sensor accuracy ± 0.3°C
Temperature fluctuation ± 0.5°C
Uniformity of mattress temperature ≤ 0.8°C
Warm-up time(from 25°C) <30min
Internal noise level <50dB(A)
Infant bed tilt angle ± 10°
Mattress size 65cm(L)*37cm(W)
Trough capacity 1200mL
Air filter 0.5 μm



MN-ICB003 Transport Infant Incubator

Power supply AC110/220V 60/50Hz
Power input 450VA
Environment temperature 10°C~30°C
Operating condition Environment relative humidity 30%~75%
Environment air velocity of flow <1m/s
Air temperature control range 25°C~37°C 37.1°C~38°C
Skin temperature control range 32°C~37°C 37.1°C~37.5°C
Air/Skin temperature sensor accuracy ± 0.3°C
Temperature fluctuation ± 1°C
Uniformity of mattress temperature ≤ 1.5°C
Air temperature deviation alarm ± 3°C
Skin temperature deviation alarm ± 1°C
Warm-up time ≤40min
Internal noise level ≤60dB(A)
Main battery DC12V 40AH, Li-ion battery
Charge time 12hours
Battery use time 2hours
Auxiliary battery DC8.4V 0.17AH, Li-ion battery
Mattress size 63cm(L)*32cm(W)
Trough capacity 1000mL
Air filter 0.5μm



MN-ICB004 High End Infant Incubator

Front and rear double-walls and air curtain
Drawers Large (28.0cm x 24.7cm x 36.0cm)
Drawers Small (28.0cm x 11.3cm x 36.0cm) *2



MN-IW001 Basic Infant Warmer

Alarm functions :
Power failure, temperature deviation,
temperature sensor failure, skin temperature
failure, over temperature A second thermal
cut-out function for more safety



MN-IW002 Standard Infant Warmer

Audible and visual Alarm functions :power
failure, temperature deviation,
temperature sensor failure , skin temperature
failure,over temperature.



MN-IW003 Top Level Infant Warmer

Microprocessor based servo controlled
temperature system Three modes:
pre-warm, manual or automatic
Set temperature and skin temperature
display separately
Special design inclined heater head is
more convenience for X rays Carbon steel
heater for more effectiveness



MN-IW004 High End Infant Warmer

10.4" LCD touch screen
Baby, manual and pre-heating mode
APGAR and CPR timer
Transparent Bed Side Panels
Tilting Trendelenburg 12°
Examination lamp
IV-pole and shelf



MN-PT001 Photo Therapy Lamp

Irradiance intensity is adjustable in 3
grade : Low, medium, high LCD screen
display therapy time and integral time
seperately



MN-PT002 Photo therapy Unit

3.5inch LCD TFT Color Touchscreen
16 Blue Super LED and 4 White LED
*Spectral Irradiance
-> 85 μ W/cm²/nm at distance 30cm
-> 50 μ W/cm²/nm at distance 40cm
-> 35 μ W/cm²/nm at distance 50cm*
Wavelength Range 400-550nm (440-460nm peak)
Life-time of the Lamps with 50.000 Hours
Adjustable Irradiance Intensity % 0 - 100 (% 5
increments)
Treatment Timer, 0 - 99 hour

Suction Machine

MN-SM001
Portable Suction Unit



Liquid Bottle: 1L
Dimension: 335*150*240mm

MN-SM002
Portable Suction Unit



Liquid Bottle: 1L
Dimension: 196*235*243mm

MN-SM003
Double Bottle Suction Unit



Liquid Bottle: 2 PCs
Capacity of Bottle: 2.5L Each
Dimension: 380*312*480mm

MN-SM004
Double Bottle Suction Unit



Liquid Bottle: 2 PCs
Capacity of Bottle: 2.5L Each
Dimension: 350*312*800mm

Oxygen Concentrator

MN-OC001 Home Use
Oxygen Concentrator



MN-OC002 Double flow
Oxygen Concentrator



MN-OC003
Oxygen Concentrator



MN-MOC001 1L
Medical Use
Oxygen Concentrator



MN-MOC002 3L
Medical Use
Oxygen Concentrator



Autoclave

Vertical Pressure Steam Sterilizer



MN-HG

Fully Automatic Circulation
35L/50L/75L/100L Available



MN-HD

LCD Display Automation
35L/50L/75L/100L Available



MN-LD

LED Display Automation
35L/50L/75L/100L/120L/150
L Available



MN-HV

Pulse Vacuum Automatic
50L/75L/100L Available

Portable Pressure Steam Sterilizer



MN-HDD

LED Display Automation
18L/24L Available



MN-YX

18L/24L Available



MN-LM

Electric or LPG Heated
18L/24L Available

Table Top Steam Sterilizer



MN-TMJ

24L Available



MN-D

20L/24L/35L/50L Available



MN-XB

20L/24L Available



MN-DV

20L/24L/35L/50L Available

Horizontal Pressure Steam Sterilizer



MN-YV

100L/150L/200L/300L Available



MN-YDA

LCD Display Automation
35L/50L/75L/100L Available



MN-YDB

Microcomputer Control
150L/200L/280L Available



MN-YDC

YDC150L/200L/280L Available

04

Medical Device

Patient Monitor

MN-PM001 Bedside Patient Monitor

Separated Parameters Module
7" Standard 5 Para Patient Monitor
ECG, NIBP, SPO2, RESP, HR



MN-PM002 ICU Patient Monitor

Separated Parameters Module
12" Standard 6 Para Patient Monitor
ECG, NIBP, SPO2, RESP, TEMP, HR



MN-PM003 Patient Monitor

Separated Parameters Module
12" Standard 6 Para Patient Monitor
ECG, NIBP, SPO2, RESP, TEMP, HR



MN-PM004 ICU Patient Monitor

Separated Parameters Module
12" Standard 6 Para Patient Monitor
ECG, NIBP, SPO2, RESP, TEMP, HR



MN-PM005 Neonate Monitor

Separated Parameters Module
15" Standard 6 Para Patient Monitor
ECG, NIBP, SPO2, RESP, TEMP, HR



Infusion Pump

MN-IP001 Single Channel Infusion Pump

Channel:	Single
Pressure Range:	30Kpa-160Kpa (High, Middle, Low Adj.)
Security Classification:	Class I, BF type
Min: drop/min:	Auto Change
Dimension:	148*108*210mm
GW:	2.3 KG



MN-IP002 Double Channel Infusion Pump

Channel:	Double
Flow Rate Range:	0.1-1200M/l
Pressure Range:	30Kpa-160Kpa (High, Middle, Low Adj.)
Alarm Conditions:	Power switch/occlusion/air in tube/door open/infusion finished/flow battery/no operate/tube error installed/no medicine liquid/tube spoilage
Dimension:	188*115*196mm
GW:	3.8 KG



MN-semi-2 Infusion Pump

Brand-new appearance
small and lightweight
design as portable;
3.5"colorful touchscreen to display
various information on one page;



MN-semi-1 Syringe Pump

High-quality PBT enclosure
which makes medical disinfection and cleaning convenient
Multi -and Across-combination of syringe
pump and infusion pump is enabled by Slide guide
and lock catch design, which is safe and practical.



Ultrasound Machine

MN-UltraL3 Notebook-style color ultrasound

15 inch LCD monitor
Windows platform system (Win10)
Single-probe interface
512GB SSD
Number of elements: 128
Trolley case as standard
PW,CW
Ladder imaging, spectrum auto-tracing
Support direct printing of patient reports
Built-in rechargeable lithium battery (15600mAh)



MN-Ultra5 3D/4D/5D Color Ultrasonic Diagnostic Apparatus

Ultrasonic host operating system: Windows 8 operating system
Spectrum pulse Doppler
Direction energy Doppler
Real time three Synchronization
Space composite imaging
Organized harmonic imaging
2B/4B mode
Language: CN/EN/FR/SP/RU
Monitor: 15 inches, high definition medical LED display
Display 0-30° adjustable
Physical clipboard: save the image on the left side of the screen, which can be directly saved or deleted.
System is upgradable
Presetting: For different inspections, preset inspection conditions for optimized images, reduce adjustments during operation, and commonly required external adjustments and combined adjustments
Support real-time 3D function
Two active probe connectors
Support Trapezoidal imaging



MN-Ultra7/MN-Ultra7A 3D/4D/5D Color Ultrasonic Diagnostic Apparatus

Operating system: Windows 8
Pulse Wave Doppler
Directional Energy Doppler
Real-time triple synchronization
Spatial Composite imaging
Tissue Harmonic Imaging
2B/4B Imaging
Support system languages: Chinese, English, French, Russian, Spanish.
Standard monitor size: 21.5 inch, high-definition medical grade LCD display, and 13.3 inch touch screen
Integrated clipboard: display the saved images at the bottom of the screen, which can be directly transferred or deleted
With on-site upgradeable functions
Preset conditions: For different inspections, preset inspection conditions for optimized images, reducing adjustments during operation, and commonly required external adjustments and combined adjustments
Support real-time 3D imaging function (3D/4D/5D)
Probe ports: 4 active
Trapezoidal Imaging
One-key auto optimization

MN-Ultra7



MN-Ultra7A



MN-S300 Full Digital LED Portable Ultrasound

12.1" LED Player.
Display modes: B, B/B, 4B, B+M, M.
Gray scale: 256 levels.
Dynamic range: 0~120dB adjustable.
External LED display have 16 kinds of pseudo color.
Permanent storage: 128 images.
Capacity cine loop: real time display 256 consecutive images which are memorized successively.
Gain control: 8 segments TGC and overall gain can be adjusted respectively.
Frequency conversion: 2.5MHz/3.0MHz/3.5MHz/4.0MHz/5.0MHz five periods of frequency conversion; frequency range applies 5.5 MHz/6.0 MHz/6.5 MHz/7.0 MHz/7.5MHz can match high frequency probe.
Image multiplying factor: 3.5MHz/R60 convex array probe: ×0.8, ×1.0, ×1.2, ×1.5, ×1.8, ×2.0 (six modes) ×0.8, ×1.0 (display penetration depth).
E-zoom: magnify 2 times of real time image.
Focus position: dynamic electron focusing.



MN-Ultra3C Wireless B Ultrasound Machine



MN-Ultra3L Wireless B Ultrasound Machine



MN-Ultra4 Wireless B Ultrasound Machine



MN-Ultra5C Handheld Convex Color Doppler



MN-Ultra5CL B Ultrasound Machine



MN-Ultra5CPL Wireless Handheld Color Doppler



MN-Ultra5L Handheld Linear Color Doppler



MN-Ultra5MC Wireless B Ultrasound Machine



MN-Ultra5CT B Ultrasound Machine



MN-300
Notebook-style color ultrasound



MN-E20
Laptop Color Doppler Ultrasound Machine



MN-S30
LED Laptop Ultrasound Scanner



MN-S30B
Full Digital Diagnostic System



MN-S3500
Notebook Color Doppler Ultrasound
Scanner



MN-S218
LED Portable Ultrasound Scanner



Endoscope

MN-HD370
Hd endoscopic camera

Camera: 2,000,000 pixels 1/2.8"CMOS
• Resolution: 1920 (H)*1080(V)
• Video output: HDMI,SDI,DVI,BNC,USB
• Handle wire: 2.8m/Length customized
• LED Lamp power: 100W/Long life: 50000Hours
• Power: 85~264VAC
• Monitor: 24 " monitor
• Language: Chinese, English, Russian, French, Spanish, Portuguese can be Switched

MN-HD380
Full hd endoscopic camera

Camera: 3,000,000 pixels 3"1/2.8M CMOS
• Resolution: 1920(H)*1300(V)
• Video output: 3G-SDI,DVI,VGA,HDMI,USB
• LED lamp power: 120W/Long life: 50000Hours
• Power: 85~264VAC-Monitor: 17.3 " /24 "
• Monitor Language: Chinese, English, Russian, French, Spanish, Portuguese can be Switched

MN-ESP006
With gastroenteroscope

Item NO:
MN-EMV-600 Video Gastroscope
MN-ECV-600 Video Colonoscope
MN-LG-880 Cold Light Source
MN-EMV-6000 Video Processor
MN-SM005 Suction Devices
MN-TR001 Professional Medical Trolley
MN-CSD002 24 Inch Medical HD Monitor
MN-AW001 Auxiliary water pump
MN-WS001 Endoscopy workstation software

MN-ESP010
Competitive gastroenteroscope

Item NO:
MN-EMV-200 Video Gastroscope
MN-ECV-600 Video Colonoscope
MN-LG-800 Cold Light Source
MN-EMV-6000 Video Processor
MN-SM005 Suction Devices
MN-TR001 Professional Medical Trolley
MN-CSD001 24 Inch Monitor

**MN-ESP009 With dye-
attached gastroenteroscope**



Item NO:

- MN-EMV-600 video Gastroscope
- MN-ECV-600 Video Colonoscopy
- MN-EMV-9000 Video Processor
- MN-LG-880 touch screen light source
- MN-CSD003 LCD monitor- (Samsung/Philips)
- MN-TR001 Trolley
- working station

**MN-ESP010
Competitive gastroenteroscope**



Item NO:

- MN-EMV-200 Video Gastroscope
- MN-ECV-600 Video Colonoscopy
- MN-LG-800 Cold Light Source
- MN-EMV-8000 Video Processor
- MN-SM005 Suction Devices
- MN-TR001 Professional Medical Trolley
- MN-CSD001 24 Inch Monitor

**MN-ESP011
Pediatric gastroenteroscope**



Item NO:

- MN-EMV-200P Video Gastroscope
- MN-EMV-400P Video Colonoscopy
- MN-LG-880 Cold Light Source
- MN-EMV-9000 Video Processor
- MN-SM005 Suction Devices
- MN-TR001 Professional Medical Trolley
- MN-CSD001 24 Inch Monitor

**MN-ESP012
Duodenum**



Item NO:

- EMV-4000 Video Duodenoscope
- LG-880 Cold Light Source
- EMV-9000 Video Processor
- Professional Medical Trolley
- 24 Inch Monitor

Laryngoscope

MN-CR-31D
Disposable Video Laryngoscope

Disposable Blade Parameter

Blade	Application	Intubation Inner Diameter (mm)	Length (mm) ±2mm	Width (mm) ±1mm	Height (mm) ±2mm	Angle (B) ±2°	Sterilize method
D-48L00	Premature	2.0-3.0	47mm	12.5mm	14mm	10°	sterilized by low temperature
D-48L0	Neonate	2.5-4.0	65mm	12.5mm	14mm	11°	
D-48MC1	Pediatric	4.5-6.0	94.5mm	23mm	14mm	14°	Hydrogen Peroxide-Gas
D-48MC2	Small Adult	5.5-6.0	109mm	23mm	18mm	16°	
D-48MC3	Adult	5.5-6.0	109mm	23mm	40mm	16°	Plasma(HGP) or Glutaraldehyde
D-48MC4	Large Adult	7.5-10.0	117.5mm	23mm	31.5mm	17°	
D-Blade	Difficult Airway	7.5-10.0	94mm	23mm	38mm	18	sterilization

MN-CR-31
Reusable Video Laryngoscope

Reusable Blade Parameter

Blade	Application	Intubation Inner Diameter (mm)	Length (mm) ±2mm	Width (mm) ±1mm	Height (mm) ±2mm	Angle (B) ±2°	Sterilize method
MIL00	Premature	2.0-3.0	47mm	12mm	14mm	10°	sterilized by low temperature
MIL0	Neonate	2.5-4.0	65mm	12mm	14mm	11°	temperature/Hydrogen Peroxide-Gas
MIL1	Pediatric	4.0-6.0	94.5mm	23mm	14mm	14°	Plasma
MIL2	Small Adult	5.0-8.0	109mm	23mm	18mm	16°	
MIL3	Adult	6.0-9.0	209mm	23mm	31.5mm	17°	HGP/ster or Glutaraldehyde
MIL4	Large Adult	7.5-10.0	216mm	23mm	34mm	17°	
MIL5	Neonate	2.5-4.0	94mm	23mm	14mm	18	sterilization
MAC1	Pediatric	4.0-6.0	109mm	23mm	14mm	10°	
MAC2	Small Adult	5.0-8.0	122mm	23mm	14mm	12°	
MAC3	Adult	6.0-9.0	142mm	23mm	14mm	14°	
MAC4	Large Adult	7.5-10.0	161mm	23mm	14mm	16°	
MAC5	Difficult Airway	7.5-10.0	162mm	23mm	34mm	17°	
MACD0	Difficult Airway Neonate	2.5-4.0	94mm	23mm	14mm	10°	
MACD1	Difficult Airway Pediatric	4.0-6.0	109mm	23mm	14mm	11°	
MACD2	Difficult Airway Small Adult	5.0-8.0	125mm	23mm	14mm	12°	
MACD3	Difficult Airway Adult	6.0-9.0	145mm	23mm	14mm	14°	
MACD4	Difficult Airway Large Adult	7.5-10.0	163mm	23mm	14mm	16°	
MACD5	Difficult Airway	7.5-10.0	181mm	23mm	14mm	17°	

Defibrillator

MN-DEF001 Multi-function Defibrillator

Display:

Screen Type: High-resolution display
Screen Size: 7 inches (17.7 cm) diagonally
Sweep Speed: 25mm/sec
Information: Heart Rate, Lead/Pads, Alarm, On/Off, SpO2, AED Functions and Prompts Alarm Selection and Limits Delivered Energy.



MN-DEF002 Basic Defibrillator

Type: Manual, Synchronized, Asynchronized,
Output Waveform:
Monophasic technology/Biphasic technology (optional)
Energy Accuracy $\leq \pm 1\%$
Energy Selection: 0, 3, 5, 7, 10, 20, 30, 50, 100, 200, 300, 360 Joule
(nominal at a resistance of 50)
Charging time: Maximum 8 seconds to 360 Joules
Standard: Adult/Pediatric Paddles, Reusable external adult Paddles



MN-DEF003 High End Defibrillator

Voice prompt
Standard built-in Recorder
Defibrillation discharge trigger recording
The ECG waveform via paddle electrode
Heart Rate, Lead, Alarm On/Off
Delivered Energy Displayed on a screen
Standard Li-ion battery
Size: 7 inches (17.7cm) diagonally
Defibrillator Biphasic/ Manual



MN-Defi 5S Defibrillator



Selectable energy for patients of different ages 50, 50, 75J, 150, 150, 200J

MN-Defi 5S eXtra Defibrillator



Selectable energy for patients of different ages 30, 30, 50J, 50, 50, 75J, 120, 120, 150J, 150, 150, 200J

MN-Defi 5S Pro Defibrillator



Selectable energy for patients of different ages 30, 30, 50J, 50, 50, 75J, 120, 120, 150J, 150, 150, 200J

ECG Machine

MN-ECG001 3 Channel
Electrocardiograph



3 Channel, 12 Lead ECG.
7" touch screen

MN-ECG002 6 Channel
Electrocardiograph



6 Channel, 12 Lead ECG.
4.3" touch screen

MN-ECG003 12 Channel
Electrocardiograph



12 Channel, 12 Lead ECG,
10.2" color touch-screen

Diathermy Machine

MN-DM100V
Diathermy Machine



Large digital display
Small size, easy to carry, cost-effective
Mono & bipolar working modes
2 output control modes: foot & manual
Automatic boot detection and error prompt function
monopolar cutting: Pure cut, blend 1, blend 2
monopolar coagulation: forced coagulation, spray coagulation
Bipolar mode: Standard mode

MN-DM300D
Diathermy Machine



Two monopolar output ports
4 monopolar cutting modes: pure cut, blend 1, blend 2, blend 3.
3 coagulation modes: spray coagulation, forced coagulation, and soft coagulation
3 bipolar output modes: macro mode, standard mode, fine mode.
CQM contact quality monitoring system
Simultaneous cutting and coagulation
Electrosurgical pens and foot switch control

MN-DM100V Pro



High-quality PBT enclosure
which makes medical disinfection and cleaning convenient
Multi -and Across-combination of syringe
pump and infusion pump is enabled by Slide guide
and lock catch design, which is safe and practical.

MN-DM300W



ESU ZG300 is a multi-function high frequency electrotome
with 7 working modes, 2-way power output and stable performance.
Unipolar power: 0-300W. Bipolar power: 0-100W
meeting all kinds of surgical needs, suitable for general department



05

Imaging Equipment

C-Arm Machine

MN-CR001
Mobile C-arm System Machine

High quality combined high frequency high voltage xray generator reduces xray dose to body
With function of kV, mA automatically track (ABS) in fluoroscopy to make the image brightness and clearness
Real time continuous Pulse Fluoroscopy with low dose, but meet operation demand with clearness image

MN-CR002
High Frequency Mobile C-arm System

Hand controller, Smart and compact design
Human graphic operation interface
Integrated computer workstation & rack
Fully digital megapixel imaging system with high definition
High quality X-ray source Multiple working modes, arbitrarily selected

MN-CR007
Mobile C-arm System Machine

With HF & HV generator,inverter, and High quality image intensifier, the x ray generator can work stably. It also reduces the damage for the doctors caused by radiation.
10.4"LCD friendly interface control board: easy operation and can be rotated to 180°(L90°,R90°) Compared with ordinary key board, our LCD display is not easy to be oxidized. Besides, the trouble will be displayed in Chinese, which will improve the efficiency of fault diagnosis.

MN-CR004
High Frequency Mobile Digital C-arm System

Advanced functions of Images optimization, strengthen module, real-time displaying the clear clinical images.
Professional working station has more image post-processing functions such as the image W/L adjustment, region of interest balance, GAMMA correction, flip, noise reduction, smoothing, sharpening etc.
Two monochrome 19" flat-screen monitors clearly visualize the smallest anatomical details

Mammography

MN-MA001 Mammography



- 1 High-definition and colorful display
- 2 Multiple function and easy operation
- 3 Radiationless,no-invasive, long life-time
- 4 Mouse action, convenient operation

x ray machine for Mammography :

- 1 Detect galactocele accurately;
- 2 Detect intraductal papilloma;
- 3 Detect mammary duct ectasia and acute mastitis;
- 4 Detect proliferation of mammary gland and breast cancer.

MN-MA002 Digital Mammography



large screen high resolution colorful display, low radiation, clear and bright image.

- 1 High-definition and colorful display
- 2 Multiple function and easy operation

Function:

- 1 Detect galactocele accurately;
- 2 Detect intraductal papilloma;
- 3 Detect mammary duct ectasia and acute mastitis;
- 4 Detect proliferation of mammary gland and breast cancer.

Digital X-Ray Machine



MN-DX56A Portable X-ray Machine

Meeting a wide range of mobile radiography imaging needs in various places, such as imaging centers, operating rooms, emergency rooms, ICUs, as well as neonatal departments, etc.



MN-DX003 Digital Radiography X-ray System

High Performance and Intelligent
Stable and Reliable Image Chain
Floor mounted elevating table DR
Cloud Image Interconnection



MN-DX004 2.5KW Mobile X-Ray machine

Fault automatic protection setting and fault alarming display.
Parameters are automatically storage when power cut off.
Adopt rotating beam limiting device to adjust the X-ray field and angle freely.
Adopt manual controller and remote controller to do exposure.
Optional: MN-DX004 mobile table for high frequency mobile X-ray equipment.
Equipped with built-in battery, can take 200 films when fully charged.



MN-DX005 HIGH FREQUENCY DIGITAL X-RAY MACHINE

Floor-mounted tube support and fixed table
Graphical anatomy program, 3D positioning guidance
Self-adaptive screen, 4-way floating bucky table
Long vertical travel of X-ray tube



MN-DX006 Medical Diagnostic X-ray System

Adopt advanced pulse fluoroscopy technology, combined with high standard hardware configuration. Well integrated ultra low dose and ultra high quality images.
New automatic dose control system, obtain clearer image information with less radiation dose, reduce radiation exposure to doctors and patients.



MN-DX007 High Level Medical Diagnostic X-ray System

The pioneer usher in intelligent radiation dose monitoring system
Synchronous dose monitoring system of hardware and software, guaranteeing more accurate diagnosis
Multiple fluoroscopy modes
Instant exposure
Lower dose to protect doctors and patients



MN-DX008 Portable X-ray Machine

Power: 5kW
Work voltage: 220~240VAC
Dimension: 265mm(L) x 240mm(W) x 210mm(H)
Weight: 15KG
Communication Interface: RS-232

Dental X-Ray Machine

MN-DXR001 Dental X-Ray



Spot: 0.4
Tube Voltage: 65k
Tube Current: 2.5m
Weight: 1.8 kg
Battery: 2500mAh
Exposure Time Range: 0.02-2s
Line voltage: 100V-240V 50Hz/60Hz

06

Stainless Steel Medical Equipment



MN-SUS001



MN-SUS002



MN-SUS002A

MN-SUS002B



Specification
750*460*800mm

MN-SUS003



Specification
580*830*880mm

MN-SUS004



Specification
780*920*980mm

MN-SUS005



Specification
780*125*920mm
640*650*920mm

MN-SUS006



Specification
780*920*980mm
880*1000*1110mm

MN-SUS007



Specification
880*400*900/1110mm

MN-SUS008



Specification
880*300*1000mm

MN-SUS009



Specification
880*400*900/1110mm

MN-SUS010



Specification
210*540*920mm

MN-SUS011



Specification
310*580*920mm

MN-SUS012



Specification
880*400*900/1110mm

MN-SUS013



Specification
880*540*920mm

MN-SUS014



Specification
995*595*900mm
935*545*850mm

MN-SUS015



Specification
310*610-750mm

MN-SUS016



Specification
310*610-750mm

MN-SUS017



Specification
310*610-750mm

MN-SUS018



Specification
312*610-750mm

MN-SUS019



Specification
312*610-750mm

MN-SUS020



Specification
310*610-750mm

MN-SUS021



Specification
1020*385*1030mm

MN-SUS022



Specification
1025*745*1220mm

MN-SUS023



Specification
1150*460*260mm

MN-SUS024



Specification
340*350mm

MN-SUS025



Specification
410*320mm

MN-SUS026



Specification
400*300*90mm

MN-SUS027



Specification
400*300*90mm

MN-SUS028



Specification
434*450*200-400mm

MN-SUS029



Specification
490*342*600-120mm
490*342*600-160mm
490*342*750-200mm

MN-SUS030



Specification
400*350*950mm
460*350*120mm
460*250*165mm

MN-SUS031



Specification
400*450*200-400mm

MN-SUS032



Specification
500*500*970mm

MN-SUS033



Specification
860*480*940mm

MN-SUS034



Specification
472*472*1150mm

MN-SUS035



Specification
600*400*740-880mm

MN-SUS036



Specification
600*430*800-880mm

MN-SUS037



Specification
885*395*900mm

Specification
935*455*900mm

MN-SUS038



Specification
950*550*1150mm

MN-SUS039



Specification
900*500*1130mm

MN-SUS040



Specification
750*500*930mm

MN-SUS041



Specification
930*500*1000mm

MN-SUS042



Specification
860*460*915mm

MN-SUS043



Specification
600*430*745-835mm

MN-SUS044



Specification
600*430*745-835mm

MN-SUS045



Specification
630*420*875mm

MN-SUS046



Specification
630*400*870mm

MN-SUS047



Specification
630*400*870mm

MN-SUS048



Specification
630*400*870mm

MN-SUS049



Specification
730*450*770-920mm

MN-SUS050



Specification
730*450*775-920mm

MN-SUS051



Specification
730*450*920mm

MN-SUS052



Specification
630*400*870mm

MN-SUS053



Specification
730*450*920mm

MN-SUS054



Specification
630*430*740-990mm

MN-SUS055



Specification
730*450*920mm

MN-SUS056



Specification
630*430*790-880mm

MN-SUS057



Specification
630*400*820mm

MN-SUS058



Specification
630*400*820mm

MN-SUS059



Specification
425*425*723mm

MN-SUS060



Specification
660*417*890mm

MN-SUS061



Specification
660*417*890mm

MN-SUS062



Specification
600*417*600mm

MN-SUS063



Specification
740*450*920mm

MN-SUS064



Specification
800*480*920mm

MN-SUS065



Specification
760*450*950mm

MN-SUS066



Specification
570*450*1000mm

MN-SUS067



Specification
730*410*1050mm

MN-SUS068



Specification
380*410*1050mm

MN-SUS069



Specification
1050*670*1260mm

MN-SUS070



Specification
1000*900*900mm

MN-SUS071



Specification
1000*920*900mm

MN-SUS072



Specification
980*440*950mm

MN-SUS073



Specification
730*450*960mm

MN-SUS074



Specification
650*450*1650mm

MN-SUS075



Specification
1110*580*985mm

MN-SUS076



Specification
780*660*1440mm

MN-SUS077



Specification
800*460*1660mm

MN-SUS078



Specification
800*900*950-1200mm

MN-SUS079



Specification
800*900*950-1200mm

MN-SUS080



Specification
850*450*910mm

MN-SUS081



Specification
800*440*950mm
800*440*950mm
800*400*950mm

MN-SUS082



Specification
800*440*950mm
800*440*950mm
800*480*950mm

MN-SUS083



Specification
1000*540*970mm

MN-SUS084



Specification
800*480*950mm
800*440*950mm
800*400*950mm

MN-SUS085



Specification
800*480*950mm
800*440*950mm
800*400*950mm

MN-SUS086



Specification
800*480*950mm
800*440*950mm
800*400*950mm

MN-SUS087




Specification
800*1790mm

MN-SUS088



Specification
500*300*700mm

MN-SUS089



Specification
800*480*1800mm

MN-SUS090



Specification
800*900*1100mm

MN-SUS091



Specification
1300*430*920mm

MN-SUS092



Specification
1300*784*920mm

MN-SUS093



Specification
1130*710*950mm

MN-SUS094



Specification
1200*650*1600mm

MN-SUS095



Specification
947*425*955mm

MN-SUS096



Specification
630*180*900mm

MN-SUS097



Specification
630*180*950mm

MN-SUS098



Specification
950*180*1750mm

MN-SUS099



Specification
930*450*1800mm

MN-SUS100



Specification
630*180*950mm

MN-SUS101



Specification
930*930*950mm

MN-SUS102



Specification
730*930*950mm

MN-SUS103



Specification
490*480*1900mm

MN-SUS104



Specification
2050*1420*950-1650mm

MN-SUS105



Specification
1800*650*1650mm

MN-SUS106



Specification
2000*1420*950-1650mm

MN-SUS107



Specification
1800*650*950mm

MN-SUS108



Specification
1800*650*1650mm

MN-SUS109



Specification
1800*450*850mm

MN-SUS110



Specification
1800*450*850mm

MN-SUS111



Specification
1550*450*850mm

MN-SUS112



Specification
1800*550*850mm

MN-SUS113



Specification
1800*550*850mm

MN-SUS114



Specification
1800*550*850mm

MN-SUS115



Specification
1215*600*1500mm

MN-SUS116



Specification
1215*900*1500mm

MN-SUS117



Specification
1200*500*1800mm

MN-SUS118



Specification
1200*500*1800mm

MN-SUS119



Specification
2000*600*2000mm

MN-SUS120



Specification
1200*500*1800mm

MN-SUS121



Specification
1200*500*1800mm

MN-SUS122



Specification
2000*600*2000mm

MN-SUS123



Specification
1100*450*1800mm

MN-SUS124



Specification
1100*450*1800mm

MN-SUS125



Specification
800*400*1800mm

MN-SUS126



Specification
1100*450*1800mm

MN-SUS126-1



Specification
1100*250*650*1800mm

MN-SUS127



Specification
1300*600*750mm

MN-SUS128



Specification
1100*450*1800mm
800*400*1800mm

MN-SUS129



Specification
1100*450*1800mm
800*400*1800mm

MN-SUS130



Specification
1100*450*1800mm

MN-SUS131



Specification
1100*450*1800mm

MN-SUS132



Specification
1100*600*650*1800mm
800*500*650*1800mm

MN-SUS133



Specification
800*400*1800mm

MN-SUS134



Specification
800*400*1800mm

MN-SUS135



Specification
800*400*1800mm

MN-SUS136



Specification
1200*600*700*1800mm
1000*900*700*1800mm
1000*900*700*1800mm

MN-SUS137



Specification
1200*900*700*1800mm
1500*900*700*1800mm
1600*900*700*1800mm

MN-SUS138



Specification
1800*700*1800mm

MN-SUS139



Specification
800*900*800*1100mm

MN-SUS140



Specification
1600*600*820/1100mm
1200*600*820/1100mm

MN-SUS141



Specification
800*600*800mm

MN-SUS142



Specification
1500*700*1050mm

MN-SUS143



Specification
2500*1000*800mm

MN-SUS144



Specification
600*600*600/1700mm

MN-SUS145



Specification
600*600*600/1100mm

MN-SUS147



Specification
1400*2300*1300/1600mm

MN-SUS148



Specification
1400*600*1700mm

MN-SUS149



Specification
1400*2000*2300/1600*1850mm

MN-SUS150



Specification
810*410*1320mm

MN-SUS151



Specification
1832*880*1675mm
2420*880*1675mm

MN-SUS152



Specification
880*350*1040mm

MN-SUS153



Specification
880*480*1000mm

MN-SUS154



Specification
847*117*650mm

MN-SUS155 MN-SUS156 MN-SUS157 MN-SUS158 MN-SUS159



Specification
150*98*94mm




Specification
130*70*120-150mm

MN-SUS157



Specification
580*390*130mm
580*390*180mm

MN-SUS158



Specification
530*380*130mm
530*380*180mm



Specification
170*140mm
200*155mm
230*175mm
260*190mm
300*200mm

MN-SUS160



Specification
400*380*33mm
310*340*31mm
280*290*30mm
230*170*28mm

MN-SUS161



Specification
310*240*31mm
300*180*50mm

MN-SUS162



Specification
310*240*31mm
300*190*50mm

MN-SUS163



Specification
150*100*45mm
200*110*45mm
250*160*45mm
300*200*50mm

MN-SUS164



Specification
150*100*45mm
200*110*45mm
250*160*45mm
300*200*50mm

MN-SUS165



Specification
120mm*120*120mm
140mm*141*128mm
160mm*160*154mm

MN-SUS166



Specification
230*85*95mm

MN-SUS167



Specification
Φ120*45mm
Φ140*52mm
Φ160*60mm

MN-SUS168



Specification
500ml Φ100*110mm
1000ml Φ120*180mm
2000ml Φ160*200mm

MN-SUS169



Specification
250*120*155mm 250g

MN-SUS170



Specification
380*290*97mm 800g

MN-SUS171



Specification
460*255*55mm

MN-SUS172



Specification
350*200*100mm

MN-SUS173



Specification
330*230*70mm

MN-SUS174



Specification
380*95*75mm

MN-YH001



Specification
900*400*1800mm

MN-YH002



Specification
900*400*1800mm

MN-YH003



Specification
900*400*1800mm

MN-YH004



Specification
900*400*1800mm

MN-YH005



Specification
900*400*1800mm

MN-YH006



Specification
900*400*1800mm

MN-YH007



Specification
900*400*1800mm

MN-YH008



Specification
900*400*1800mm

MN-YH009



Specification
900*400*1800mm



RYAN PLUS TRADING LLC S.O.C
Tel: +971 56 2885 652 (Phone, WhatsApp)
Website: www.ryan-plus.com
Email: info@ryan-plus.com
Address: Office 104 -01, Stadium Point, Sport City, Dubai, U.A.E